

**Material**

Pin header: Brass, Tin plated

Housing: PBT, UL94V-0

**Electrical**

Rated voltage: 300V

Rated current: 8A

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1 min

**Mechanical**

Temp. Range: -40 °C ~ +105 °C

Soldering: 250 °C 5Sec. Max.

**Order Information**

RE - C - 333J - 3.50 - XXP - 3 XX

RoHS


Terminal Block

Pitch

No. of Pole

Product Code: 00 ~ 99

Color: 3- Black

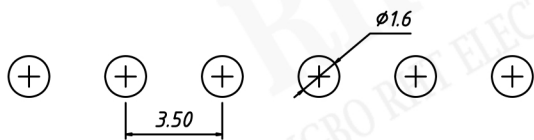

**PCB LAYOUT**



NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm

SHEET SIZE:A4

SCALE: ---

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

**TERMINAL BLOCK**