


- Material**
- Housing: PA66, UL94V-0
 - Screw: M2 Steel, Zn plated
 - Clamp: Brass, Ni plated
 - Cage: Brass, Ni plated
- Electrical**
- Rated voltage: 300V
 - Rated current: 8A
 - Contact Resistance: 20 mΩ
 - Insulation resistance: 500MΩ/DC500V
 - Withstand voltage: AC2000V / 1 min
 - Wire Range: 28~16AWG 1.5mm²
- Mechanical**
- Temp. Range: -40 °C ~ +105 °C
 - Strip length: 6~7mm
 - Torque: 0.2Nm (1.77Lbin)

Order Information

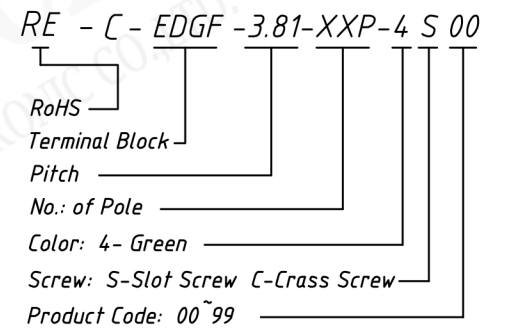

NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0~3	± 0.12	> 3~18	± 0.15	> 18~50	± 0.3
> 50~120	± 0.5				



TERMIAL BLOCK