

Material

Shrapnel: Stainless steel

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0

Electrical

Rated voltage: 300V

Rated current: 10A

Wire range: 26 ~ 16AWG 1.5mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1 min

Mechanical



Temp. Range: -40 °C ~ +105 °C

Soldering: 250°C ±5°C for 5S



Strip length: 8 ~ 9 mm

Order Information

RE - C - 211V - 5.00 - XXP - 1 XX

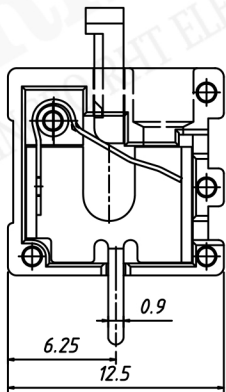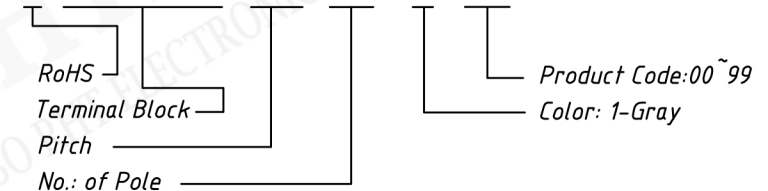

SECTION A-A

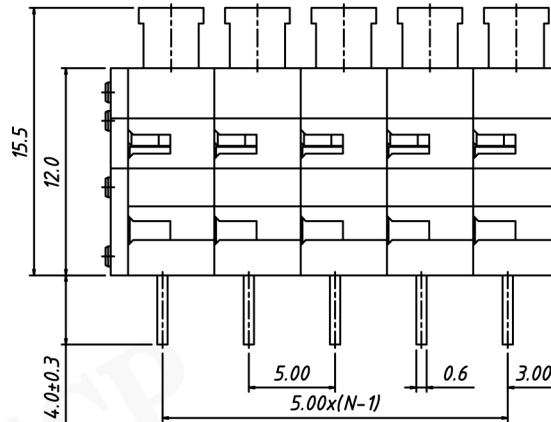

PCB LAYOUT