

**Material**

Screw: M3.0, Steel, Ni Plated

Pin header: Brass, 0.8t, Tin Plated

Housing: PA66, UL94V-0, Black

**Electrical**

Rated voltage: 300V

Rated current: 15A

Wire range: 22 ~ 14AWG 2.5mm<sup>2</sup>

Contact Resistance: 20 mΩ


Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1 min

**Mechanical**

Temp. Range: -40 °C ~ +105 °C

Torque: 0.5Nm (4.5Lb.in)

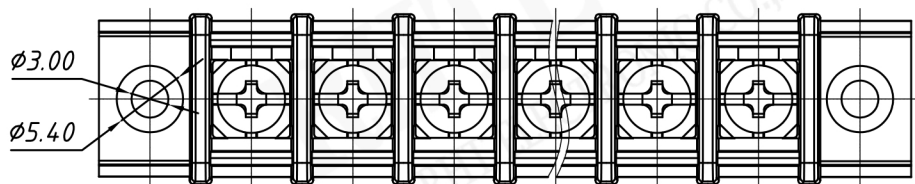

**Order Information**

RE - C - 35 C - 8.25 - XXP - A

A: With Ears

No.: of Pole

Pitch: 8.25mm

Pin Type:

Barrier Terminal Block  
Without Cover

RoHS