


## Magnetic Transducer Buzzer Series

RE-B-MWC-12\*7.5  $\phi 12 \times 7.5$ mm With Circuit Magnetic Transducer Buzzer Series

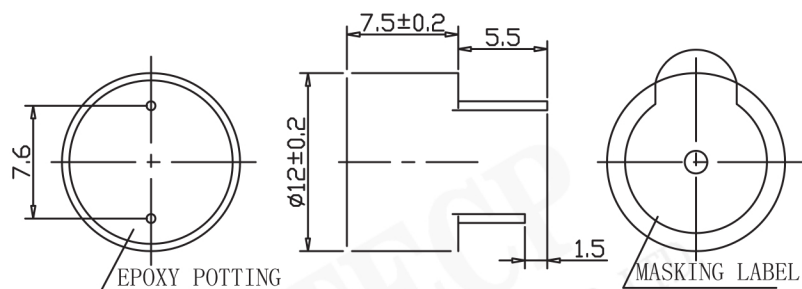

Order Code	Rated Voltage	Operating Voltage	Max. Rated Current	Min. S.P.L. (@10cm)	Resonant Frequency	Operating Temp	Weight
RE-B-MWC-12*7.5-A1	3V <sub>DC</sub>	2~5V <sub>DC</sub>	30mA	85dB	3.1 ±0.5KHz	-20 ~ +70 °C	2g
RE-B-MWC-12*7.5-A2	3V <sub>DC</sub>	2~5V <sub>DC</sub>	30mA	85dB	2.3 ±0.5KHz		
RE-B-MWC-12*7.5-B1	5V <sub>DC</sub>	3~7V <sub>DC</sub>	30mA	85dB	3.1 ±0.5KHz		
RE-B-MWC-12*7.5-B2	5V <sub>DC</sub>	3~7V <sub>DC</sub>	30mA	85dB	2.3 ±0.5KHz		
RE-B-MWC-12*7.5-C1	12V <sub>DC</sub>	9~15V <sub>DC</sub>	30mA	85dB	3.1 ±0.5KHz		
RE-B-MWC-12*7.5-C2	12V <sub>DC</sub>	9~15V <sub>DC</sub>	30mA	85dB	2.3 ±0.5KHz		

## ORDER INFORMATION

Product NO.: RE-B- MWC - 12\*7.5 - A1

Part Number \_\_\_\_\_ Order Code \_\_\_\_\_  
 With Circuit Magnetic Transducer Buzzer Series \_\_\_\_\_ Size specifications \_\_\_\_\_