


Unidirectional mini microphone MU6027 Serie


Specifications:

- Sensitivity(1KHz,0dB=1V/Pa):-47±3dB
- Directivity:Unidirectional
- Impedance:2.2KΩ Max.
- Current consumption:0.5mA Max.
- Operation voltage:1.0~10V
- S/N ratio:60dB Min.
- Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
- Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
- Frequency:20~16,000Hz

Frequency response

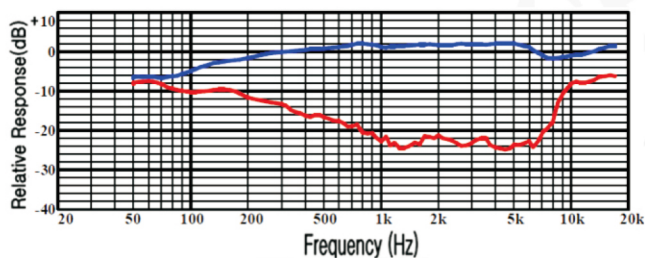

Schematic diagram VS=1.5V RL=680Ω

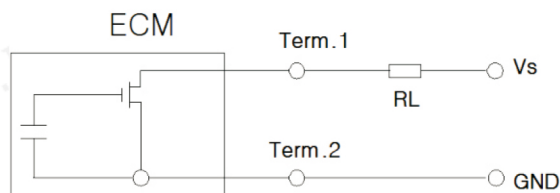

ORDER INFORMATION

Product NO.: RE-B - MU 6027 P - 473

Unidirectional mini microphone Series	
Dimensions	
Note: Soldering	
P: Pin Type	
W: Wire type	
Sensitivity	

UNITS:mm	SHEET SIZE:A4		SCALE: ---
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5