

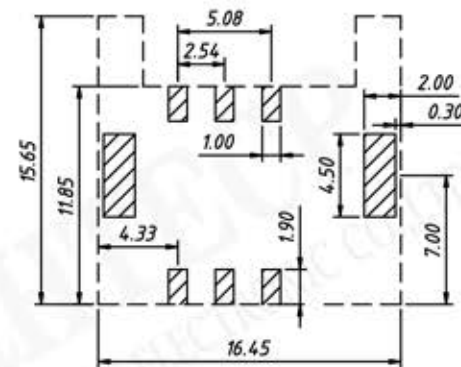
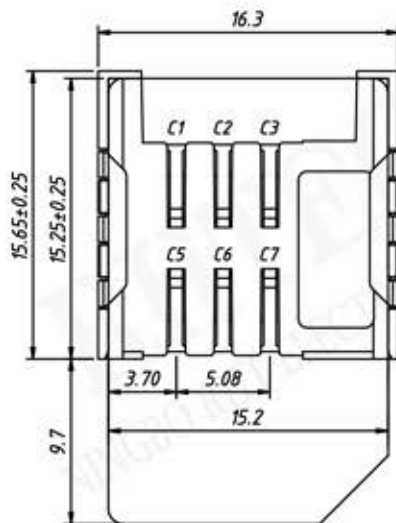


P/N: RE-C-SIM-015

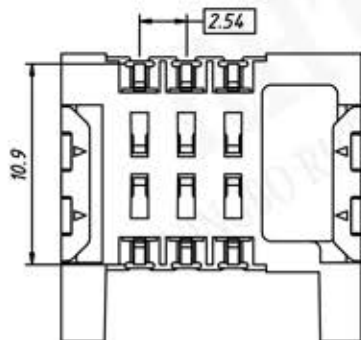

RECOMMENDED PCB LAYOUT  
TOP VIEW (TOLERANCE ±0.05)

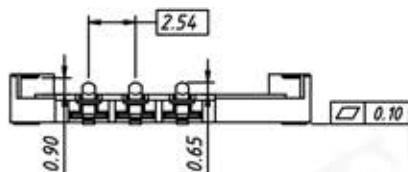

SIM CARD PINOUT		
Pin No.	Name	Description
C1	VCC	+5V OR 3.3V DC
C2	RST	CARD RESET (OPTIONAL)
C3	CLK	CARD CLOCK
C5	GND	GROUND
C6	VPP	+21V DC
C7	I/O	IN/OUT

**Material:**

Housing: Hi-Temp. Plastic, UL 94 V-0, Black.

Terminal: Copper Alloy, (T=0.15mm), Gold Plated Over Nickel.

Fork: Copper Alloy, (T=0.20mm), Tin Plated Over Nickel.

**Electrical:**

Current Rating: 1.0 A max.

Contact Resistance: 30mΩ Max.

Dielectric Withstanding Voltage: 500V AC RMS For One Minute.

Insulation Resistance: 1000MΩ Min. At 500V DC

Operating Temperature: -40°C TO +85°C.