

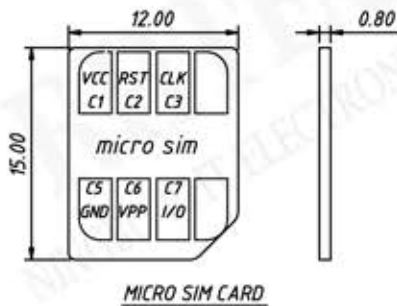


Pin #	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

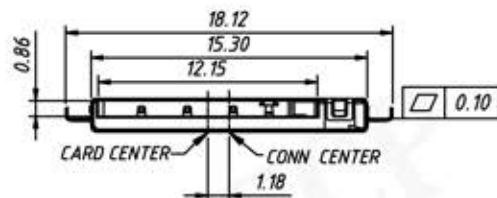

Material:

Insulator: High Temperature Thermoplastic, UL94V-0, Black.
 Contact: Copper Alloy, Plated 30u" Ni Overall, Solder Area: Tin, Contact G/F
 Shell: Stainless, 30u" Ni Overall Plated G/F Selective Contact Area.

Electrical:

Current Rating: 0.5A max.
 Voltage Rating: 50V DC max.
 Ambient Temperature Range: -20° C ~ +85° C
 Storage Temperature Range: -40° C ~ +70° C
 Ambient Humidity Range: 95% R.H. Max.
 Contact Resistance: 100mΩ Max.
 Insulation Resistance: 1000MΩ Min./250V DC
 Dielectric Withstanding Voltage: 500V AC
 Mating Cycles: 5000 Insertions
 Temperature: 260° C ± 5° C