


$L \pm 10\text{mm}$

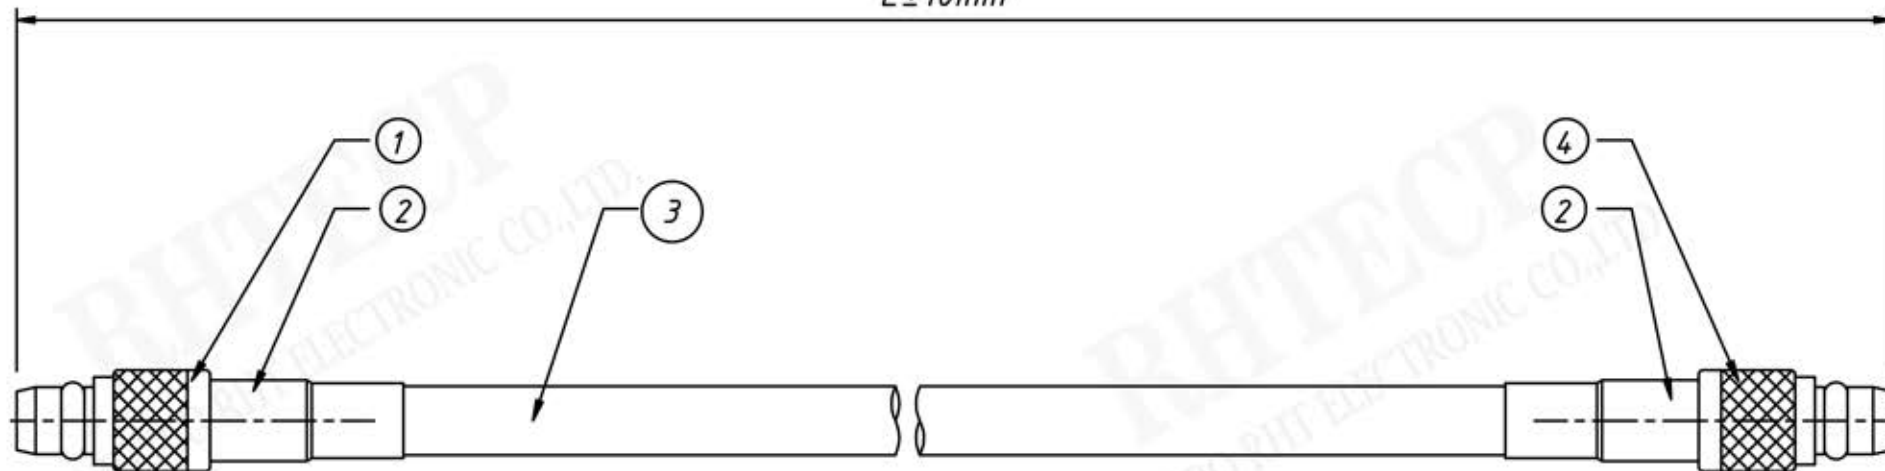

Note:

1: V.S.W.R: 1.5(0~3G), Max.


2: Wire surface shall have no dirt, broken.

3: Connector surface with coating, oxidation phenomenon.

4: Connector pins and insulator are in the same plane

Order Information

RE - ANT - RFCA21 - RG174 - L300

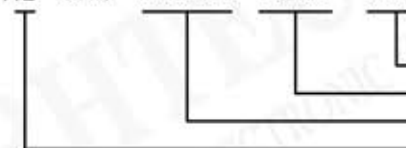

Lengs: L300=300mm

Cable: RG174 Cable or RG316 Cable

Series: MMCX Male - MMCX Male

RoHS

No.	Name	Description	UNITS	Q'ty
4	Connector	MMCX Female Plug, Straight, for RG174 or RG316	PCS	1
3	RF Cable	RG174 Cable, Black, OD2.7mm	mm	L
2	Heat-Shrink Tube	Ø2.5mm Heat-Shrink Tube, Block, L15mm	PCS	2
1	Connector	MMCX Female Plug, Straight, for RG174 or RG316	PCS	1