

**Specification:**

Frequency : 824 ~ 960/1710 ~ 2170MHz

Band width: 136/460MHz

Gain : 3dBi

Vswr : 2.0 Max.

Impedance : 50  $\Omega$

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max power : 10W

Connector : RP SMA-J


Cable: RG174, Black

Length:3000mm

Mounting Method:Screw

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C

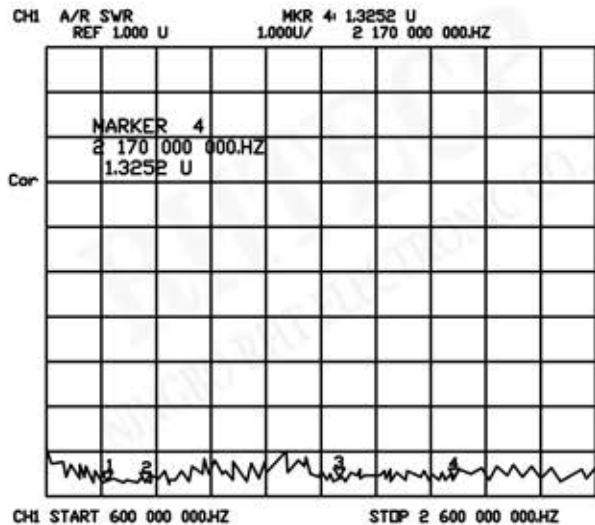

**Order Information**

