



P/N: RE-ANT-GSM918SMA

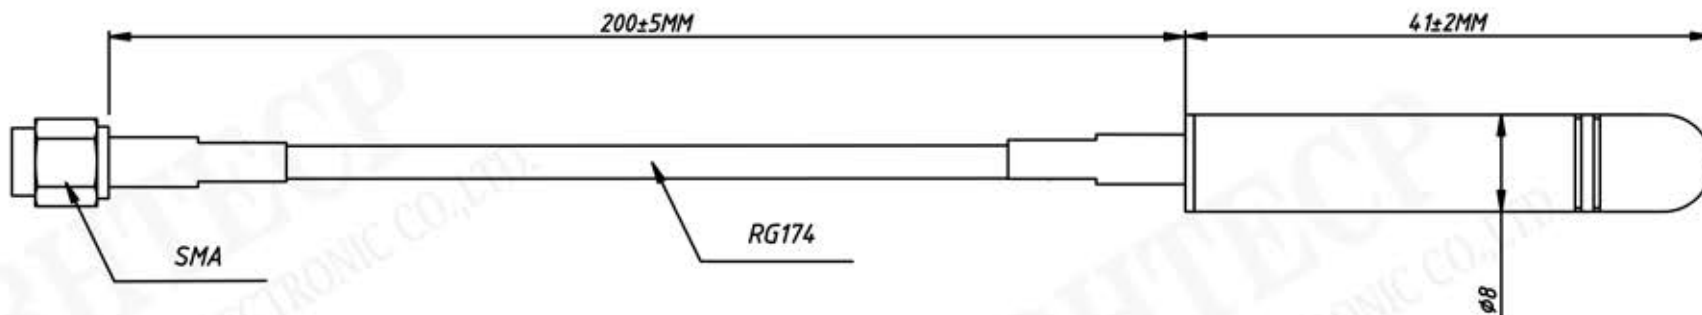

CH1 A/R SWR REF 1.000 U  
 MKR 3: 1.5238 U  
 1.000U/ 1.800 000 000.HZ

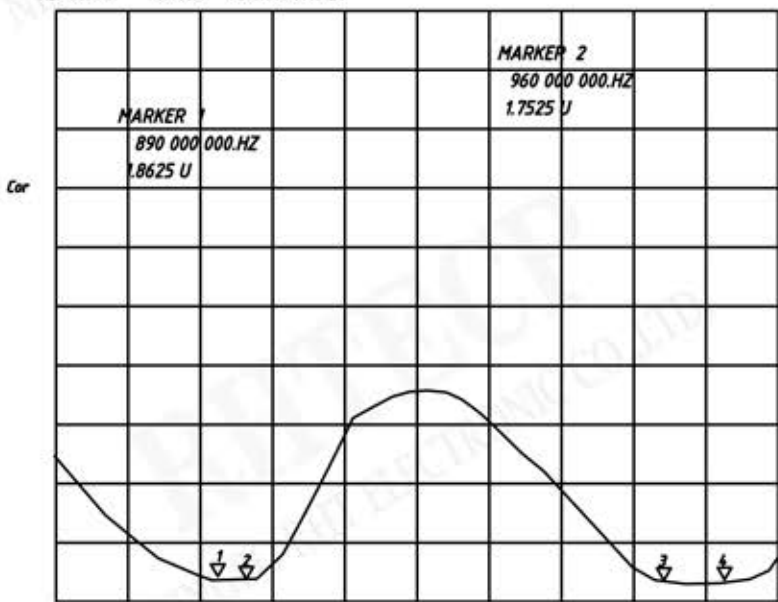

CH1 START 600 000 000.HZ STOP 2 000 000 000.HZ

**Specification:**

Frequency : 890-960/1710-1880MHz

Gain : 2dBi

Vswr : 2.0 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max power : 20W

Shell material : PVC

Hight: 41±2.0MM

Max Diameter: Ø9mm

Min Diameter: Ø2.8mm

Connector : SMA Pin

Cable: RG174, Black

Length:200mm

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C