


Order Information

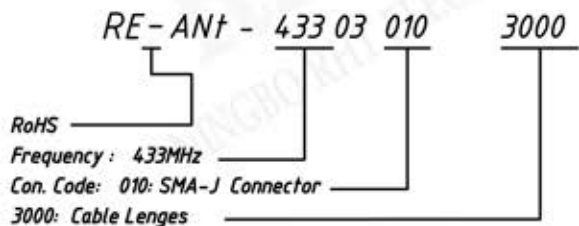

Specification:

Frequency : 433±10MHz

Gain : 3dBi

Vswr : 2.0 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Connector : SMA-J

Cable: RG174

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C