
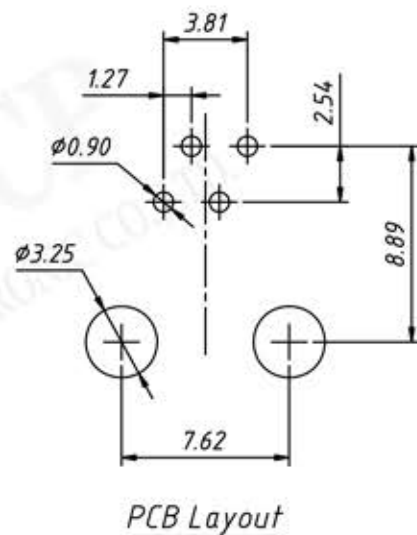


Material:
Housing: Engineering Thermoplastic
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze
Plating: Gold Plating Over Nickel in Contact.
 Tin Plating Over Nickel in Solder Area.

Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 40mΩ Max.
Insulation Resistance: 1000MΩ Min. @500VDC
Dielectric Strength: 1000VAC Rms 60Hz, 1 Min.
Durability: 750 cycles Min.
Operation Temperature: -20°C ~ +75°C

Order Information

RE - C - 152 - 4P4C - S - 1 - XX

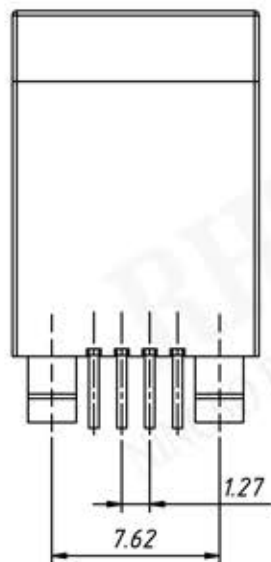

Contacts: 4P4C
Color Code: 1-Black
Plating Code:

- 01-Fu" Gold Plating
- 02-3u" Gold Plating
- 03-6u" Gold Plating
- 04-15u" Gold Plating
- 05-30u" Gold Plating