


Material:  
Housing: PBT+Glass Filled Polyester  
Flammability Rating : UL 94V-0  
Contacts: Phosphor Bronze  $\phi 0.46\text{mm}$   
Plating: Gold Plating  
Shield: Brass, Tin Plating

Electrical:  
Voltage Rating: 125VAC  
Current Rating: 1.5A  
Contact Resistance:  $30\text{m}\Omega$  Max.  
Insulation Resistance:  $500\text{M}\Omega$  Min.  
Dielectric Strength: 1000VAC Rms  
50Hz, 1 Min.  
Durability: 600 cycles Min.  
Operation Temperature:  $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

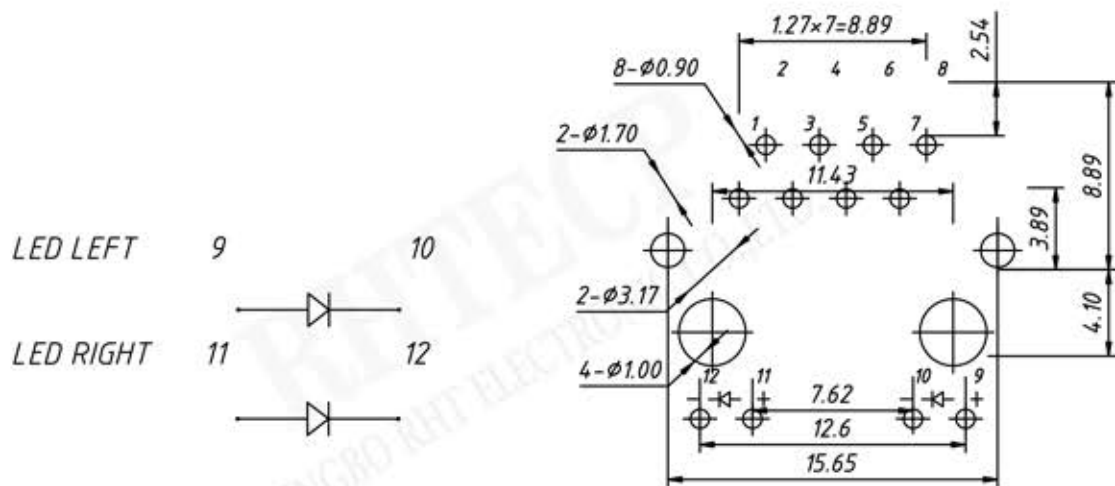

PCB Layout

Order Information

RE - C - 109B - 8P8C - W - G/Y - XX

Contacts: 8P8C  
Shield: W-with Shield  
LED Code: LEFT/RIGHT  
G/Y-Green/Yellow  
Y/G-Yellow/Green  
Plating Code:  
01-Fu" Gold Plating  
02-3u" Gold Plating  
03-6u" Gold Plating  
04-15u" Gold Plating  
05-30u" Gold Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE:A4

SCALE: ---

> 0~3

> 3~18

> 18~50

> 50~120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CONNECTORS