







Material:
Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Plating: Au or Sn over 50u" nickel

Electrical Characteristics:
Current Rating: 3.0 AMP
Voltage rating: 250V AC, DC
Withstand Voltage: 500V AC
Insulator Resistance: 1000M Ohm min
Contact Resistance: 20m Ohm max.
Operating Temperature: -40°C ~ +105°C
Max. Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Pin	Dimension mm	
	A	B
10	10.16	22.36
14	15.24	27.44
16	17.78	29.98
20	22.86	35.06
26	30.48	42.68
34	40.64	52.84
40	48.26	60.46
50	60.96	73.16
60	73.66	85.86
64	78.74	90.94

Order Information:
RE - C - 204CE - XX

IDC connectors
2.54mm Pitch
XX - No. of 10 ~ 64 pin

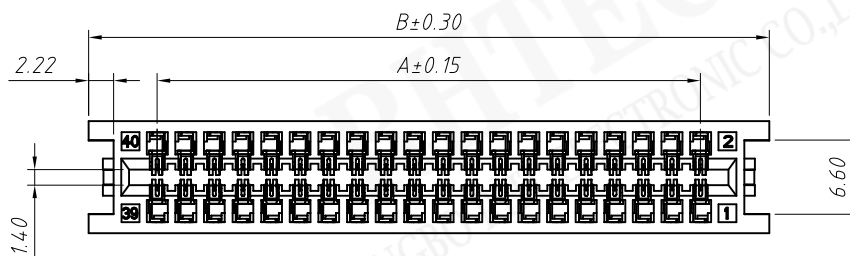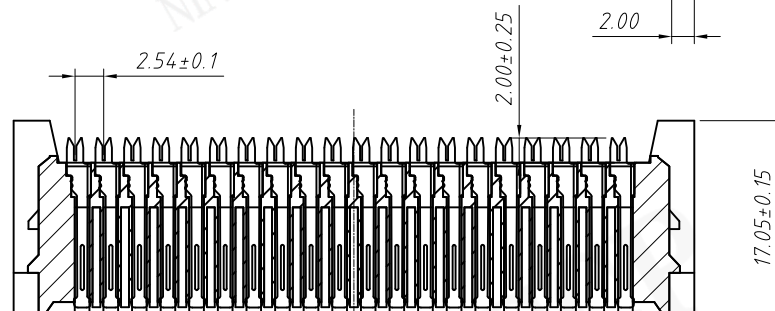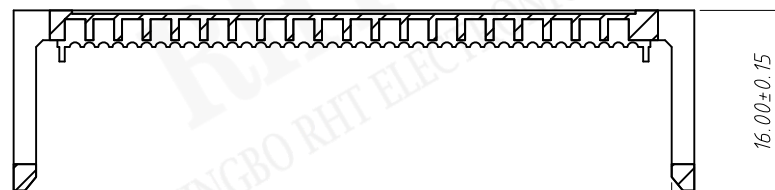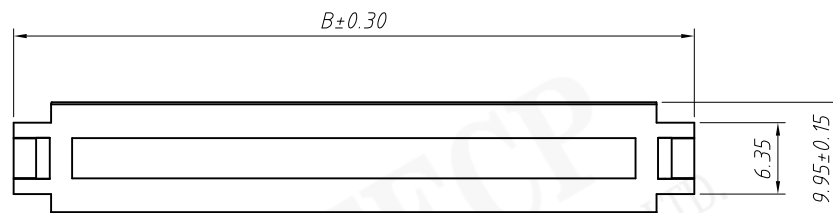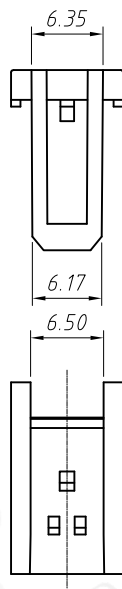

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE:A4

SCALE:---

RE-C-204CE-XX

>0~3

>3~18

>18~50

>50~120

±0.12

±0.15

±0.3

±0.5

CONNECTORS