
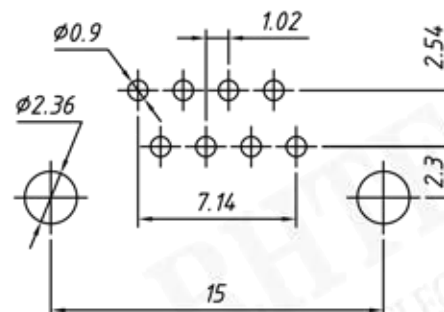


Without Panel

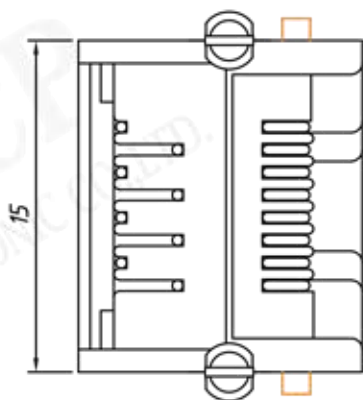


PCB Layout

**Material:**


Housing: PBT+Glass Filled Polyester  
 Flammability Rating: UL94V-0  
 Contacts: Phosphor Bronze  $\phi 0.46\text{mm}$   
 Plating: Gold Plating

**Electrical:**

Voltage Rating: 125VAC  
 Current Rating: 1.5A  
 Contact Resistance:  $30\text{m}\Omega$  Max.  
 Insulation Resistance:  $500\text{M}\Omega$  Min.  
 Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.  
 Durability: 600 cycles Min.  
 Operation Temperature:  $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

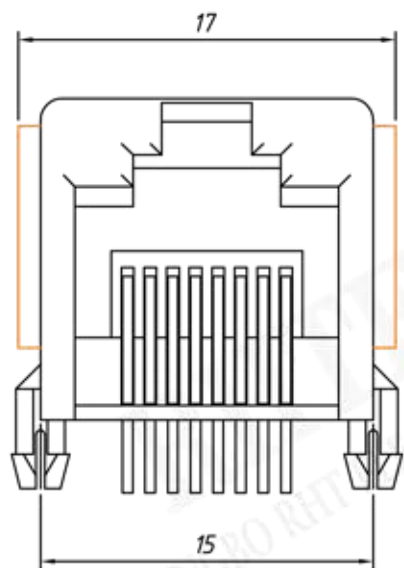

With Panel

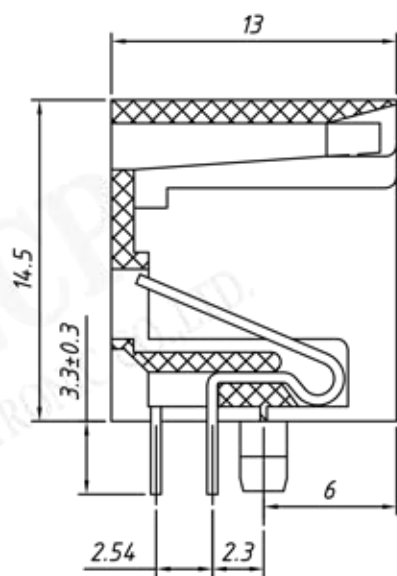

SECTION A-A

**Order Information**

RE-C-133-8P8C-W-1-XX

Contacts: 8P8C  
 Panel: W-With Panel  
       W/O-Without Panel  
 Color Code:  
   1-Black  
   2-Gray  
 Plating Code:  
   01-Fu" Gold Plating  
   02-3u" Gold Plating  
   03-6u" Gold Plating  
   04-15u" Gold Plating  
   05-30u" Gold Plating