

Material

Screw: M3.0, steel,Zn plated

Cage: Brass, Nickel plated

Pin header: Brass, Tin plated

Housing: PA66,UL94V-0,Green

Electrical

Rated voltage: 300V

Rated current: 20A

Wire range: 24~10AWG 4mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

Mechanical

Temp.Range: -40℃~+105℃

Soldering: 250℃ 5Sec.Max

Torque: 0.5 Nm (4.43Lb.)in

Strip length: 6~7mm

Order Information

RHTBY29-7.50-XXP-4SXX

Terminal Block



pitch

No. of Pole



Color:4-Green 3-Black

Screw:S-Slot Screw C-Cross Screw

Code:Product Code:00~99

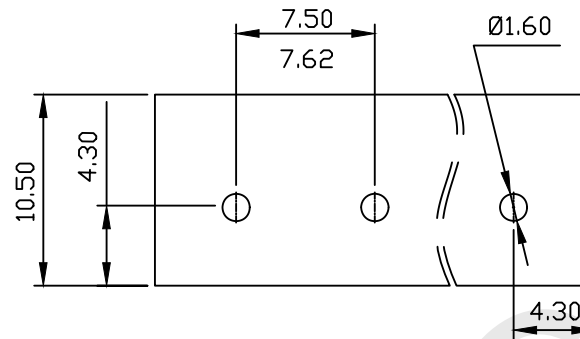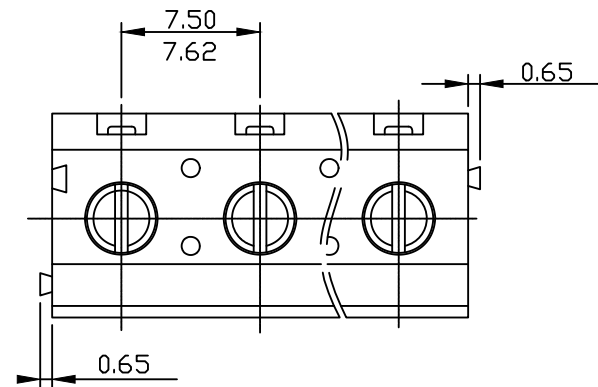

PCB LAYOUT

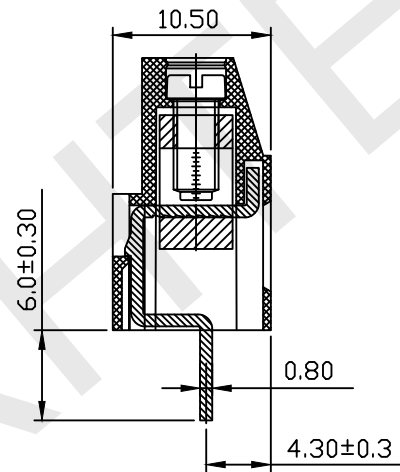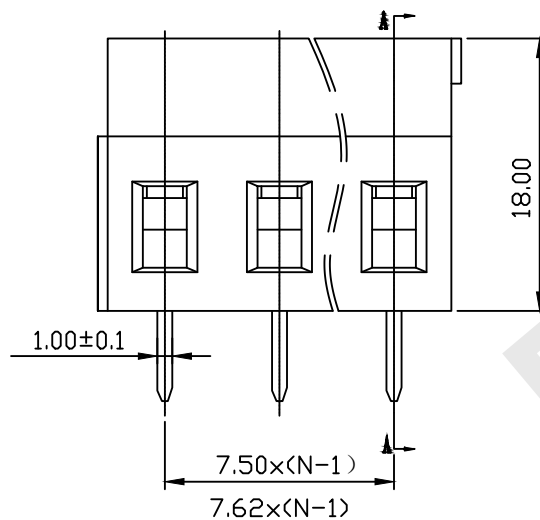

SECTION A-A



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Screw CONN TERM Block 7.50/7.62MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBY29-7.50(7.62)-XXP-4S

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9