




RoHS Compliance

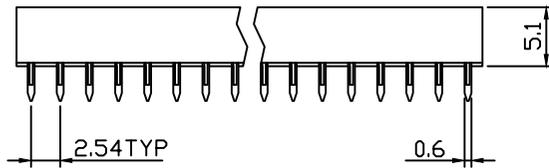

Material:
 Housing:PBT UL94V-0
 Contacts:Phosphor Bronze
 Plating: Tin Plated 100u" Over 50u" Nickel

Electrical Characteristics:
 Current Rating :1.0AMP
 Insulator Resistance:5000MΩ min
 Contact Resistance:20mΩ max.
 Operating Temperature:-40°C~+105°C

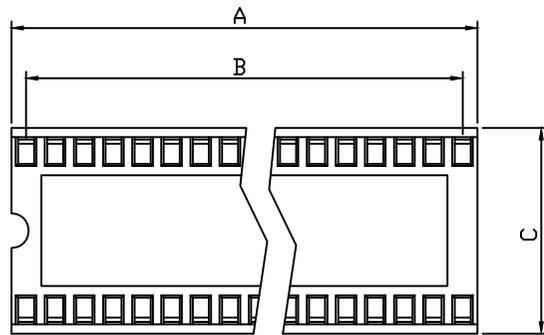

| Position | A | B | C | D |
|----------|-------|-------|-------|-------|
| 08 | 10.16 | 7.62 | 10.16 | 7.62 |
| 14 | 17.78 | 15.24 | 10.16 | 7.62 |
| 16 | 20.32 | 17.78 | 10.16 | 7.62 |
| 18 | 22.86 | 20.32 | 10.16 | 7.62 |
| 20 | 25.40 | 22.86 | 10.16 | 7.62 |
| 24 | 30.48 | 27.94 | 10.16 | 7.62 |
| 24 | 30.48 | 27.94 | 17.78 | 15.24 |
| 28 | 35.56 | 33.02 | 10.16 | 7.62 |
| 28 | 35.56 | 33.02 | 17.78 | 15.24 |
| 32 | 40.54 | 38.10 | 17.78 | 15.24 |
| 40 | 50.80 | 48.26 | 17.78 | 15.24 |
| 42 | 53.21 | 50.80 | 17.78 | 15.24 |
| 48 | 60.80 | 58.42 | 17.78 | 15.24 |

Order Information:

RHTAYB16-XX-D


IC Socket

XX-No.of 06~48 Pins

Type:

With D=15.24mm

Without D=7.62mm



PCB LAYOUT

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

| UNITS:mm | SHEET SIZE: A4 | | SCALE:--- | | DRWN BY PAN |
|----------|----------------|-------|-----------|---------------|-------------|
| 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG | |
| ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN | |

2.54mm Pitch IC Socket Connector

THIRD ANGLE PROJECTION



RHTAYB16-XX-D