

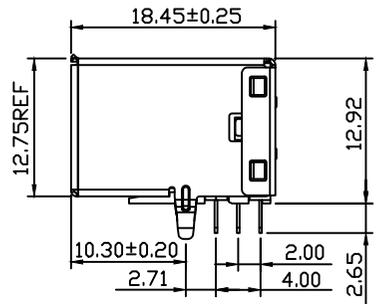


12.00




Material
 Housing: Thermoplastic, Glass Fiber Filled, UL94-HB
 Cover: Thermoplastic, Glass Fiber Filled, UL94V-0
 USB2.0 Contact: Copper Alloy, Gold.
 USB30 Contact: Copper Alloy, Gold.
 Shell: Brass/Spcc, Nickel(Ni) T=0.30MM



Electrical
 Contact Current Rating: 1.5 A For Pin1&Pin4 0.25 A Other Contacts
 Withstanding Voltage: 100vac(Rms)
 Contact Resistance: 30mΩ Max(Initial) For Pin1&Pin4
 50mΩ Max(Initial) For Other Contacts
 10mΩ Max Change For Post Test Licr
 Insulation Resistance: 1000mΩ Min

Mechanical
 Operating Temperature: -40°C TO +85°C
 Mating Force: 35N MAX
 Unmating Force: 10N MIN.

Order Information
 RHTAY48F-L
 USB 3.0 Type B
 Female Connector
 Color: L: Blue



P.C.B LAYOUT



UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	