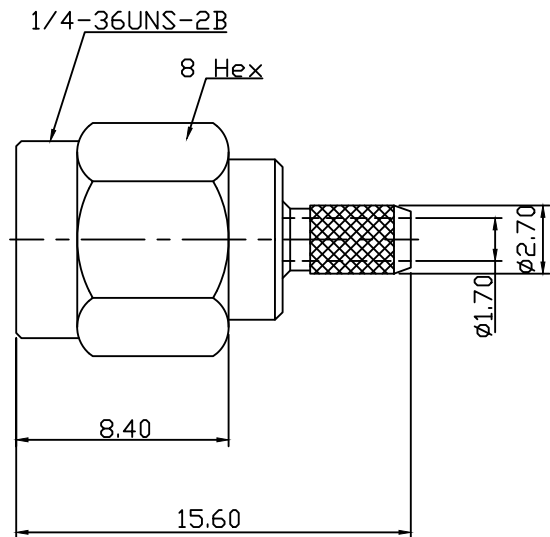


Material:

Body:Brass,Gold Plating

Contact Pin:Ber.Copper,Gold Plating

Insulator:PTFE,Natural

Ferrule:Copper,Gold Plating

Heat Shrink Tubing:Blak

Note:

Impedance:50Ω

Crimped Ferrule Hex Crimp Size 3.25

Contact Pin To Solder



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

SMA Cable Connector Straight
(Plug, Female,50Ω)

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYMA014