


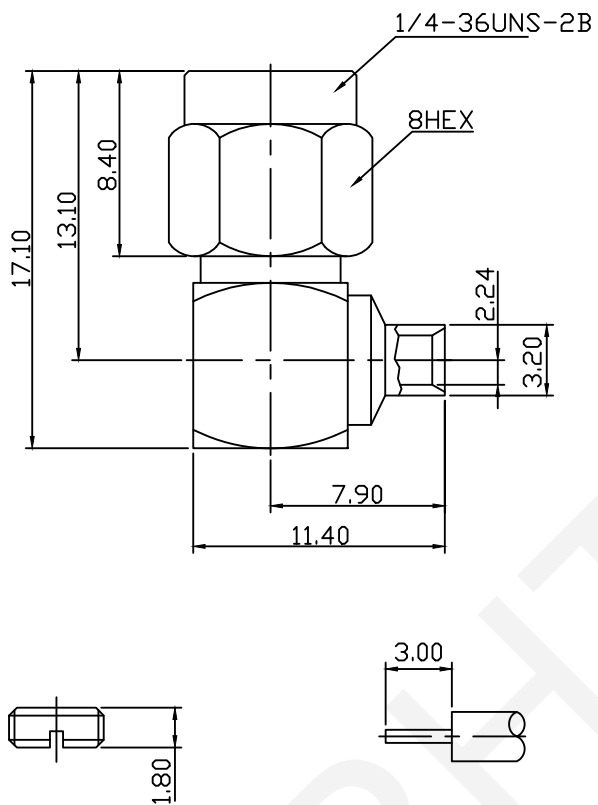

Material:

Shell: Brass, Gold Plating

Body: Brass, Gold Plating

Insulator: Teflon, Natural

Contact Pin: Brass, Gold Plating

Retainer Pin: Ber, Copper, Natural

Gasket: Silicone, Red

Cover: Brass, Gold Plating

Electrical:

Impedance: 50Ω

Mechanical:

Durability: 500 Cycles Min.

Temperature Range: -65°C to +165°C

Recommended Cable
Stripping Dim'S

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

SMA Cable Connector Right Angle
(Plug, Male, 50Ω)

THIRD ANGLE PROJECTION



RHTAYMA018