


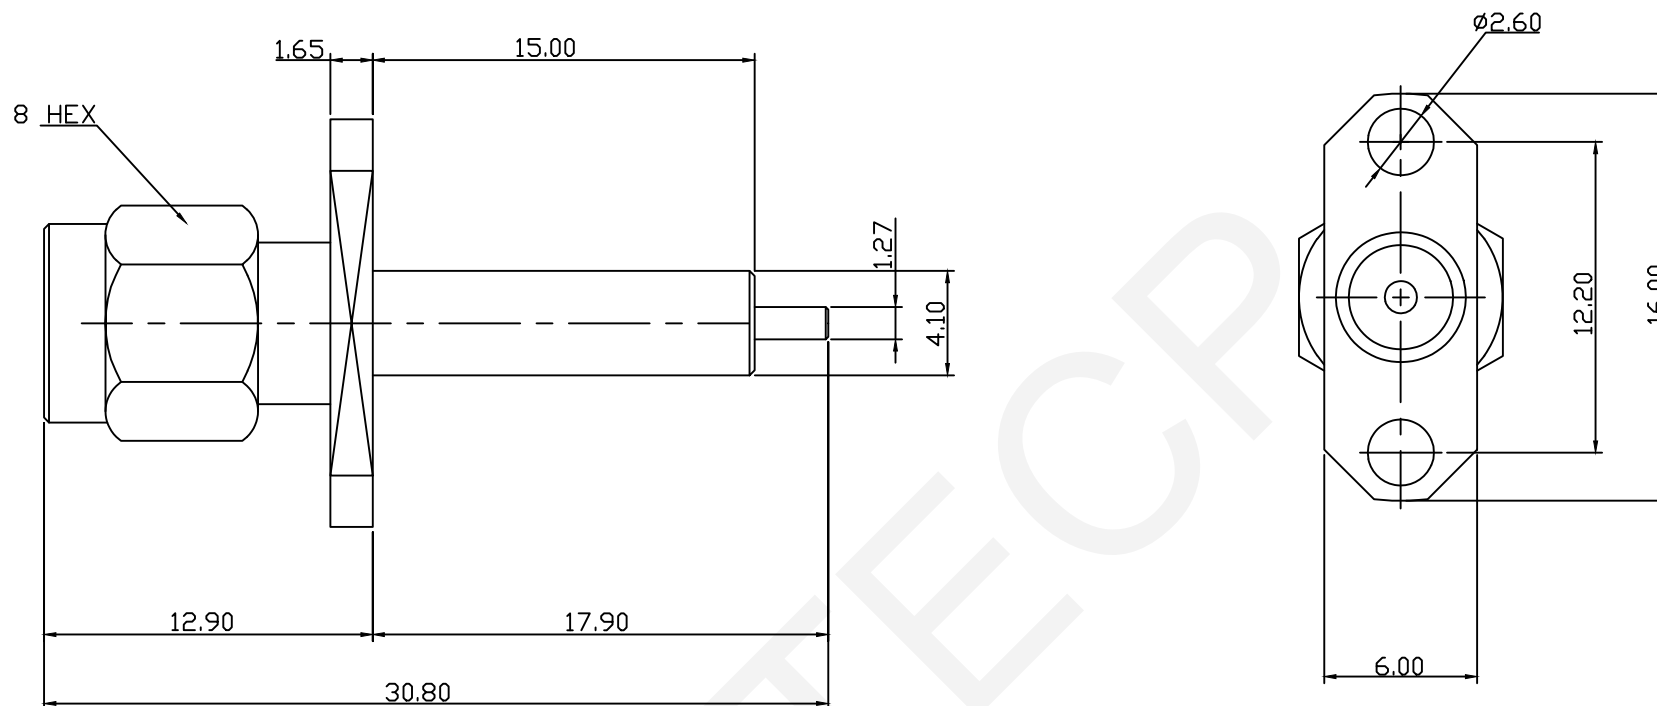


Technical parameters:

- 1.Characteristic impedance of joint: 50mΩ
- 2.Joint surface: gold plating
- 3.Mechanical demand: 500 times


Material:

Body: Brass ,Gold Plating
 Insulator: TEFL ON,Natural
 Contact Pin: Brass,Gold Plating

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN	Panel Mount SMA Connector Straight (Plug,Male,50Ω)L30.8mm	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 	RHTAYMA022A
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

RHTAYMA022A

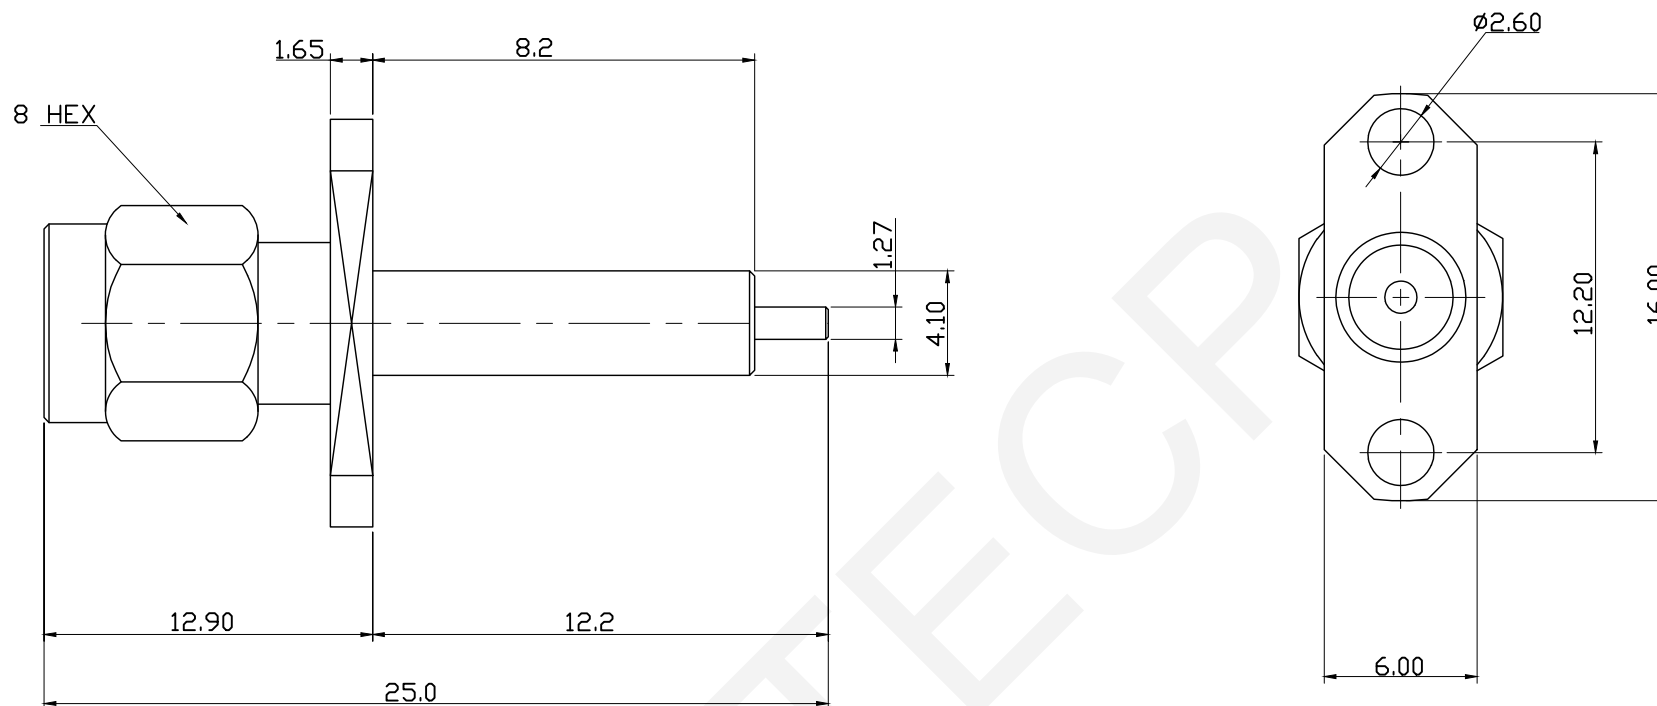

Technical parameters:

- 1.Characteristic impedance of joint: 50Ω
- 2.Joint surface: gold plating
- 3.Mechanical demand: 500 times

Material:

Body: Brass ,Gold Plating
 Insulator: TEFL ON,Natural
 Contact Pin: Brass,Gold Plating

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN	Panel Mount SMA Connector Straight (Plug,Male,50 Ω)L25mm	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 	RHTAYMA022A
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		



NINGBO RHT ELECTRONIC CO.,LTD