

SPECIFICATION

Rated Load:DC 30V 3A

Contact resistance:30mΩ, max


Insulation resistance:100MΩ, min

Withstand Voltage:AC500V


Actuating Force:3-20N

Life:5000 cycles




Operating Temperature:-30℃-70℃

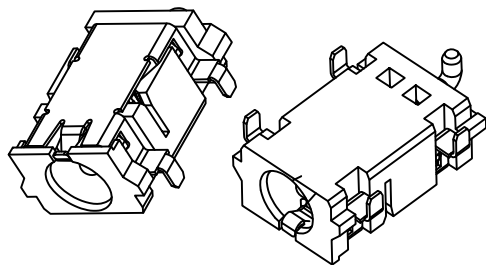

PCB LAYOUT TOP VIEW

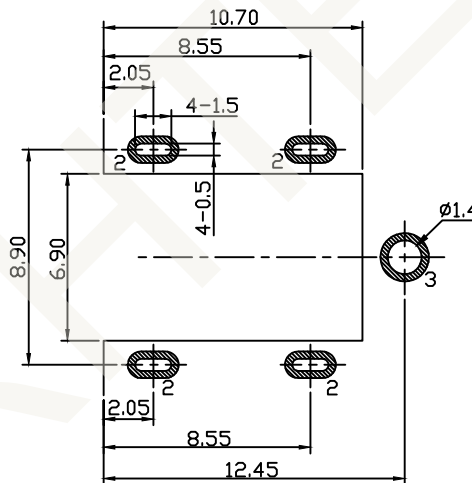

SCHEMATIC

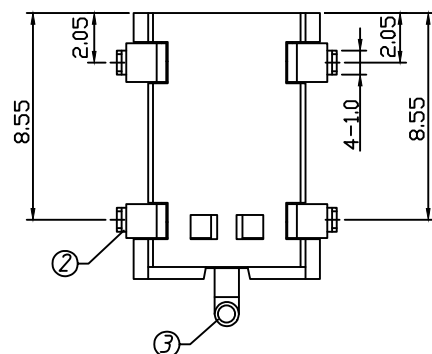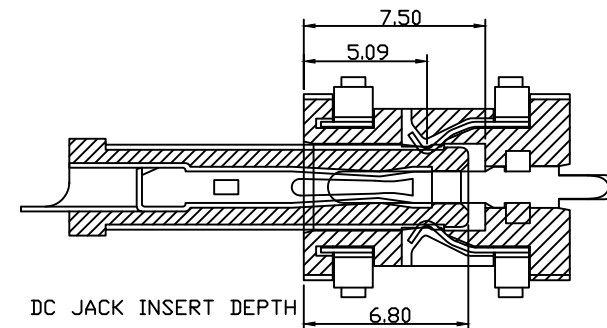

NO	Description	QTY	Material	Plating
1	Housing	1	PPA	---
1	Spring Piece	1	Bronze	Ag-Plating
1	PIN	1	Brass	Ni-Plating

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
±0.12	±0.15	±0.3
		±0.5

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

30V 3A DC Jack Mid Mount 0.8/1.0/1.3mm
THIRD ANGLE PROJECTION
RHTAY13DC-002