




PCB LAYOUT TOP VIEW

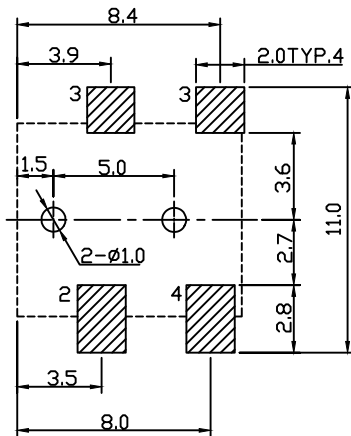

PIN	Ø1.0	Ø1.3
APPD		

SCHEMATIC



SPECIFICATION

Rated Load:DC 30V2A

Contact resistance:30mΩ, max




Insulation resistance:100MΩ, min

Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 cycles

Operating Temperature:-30℃~70℃

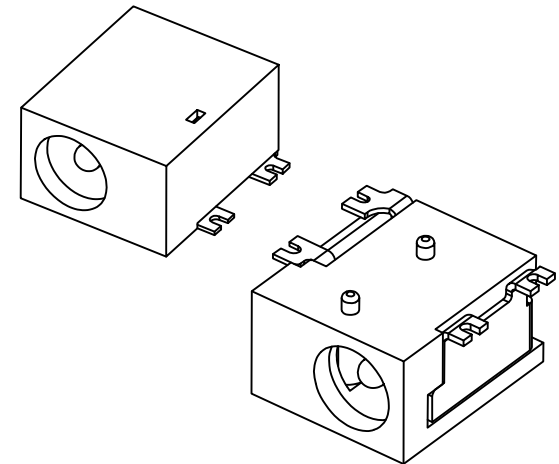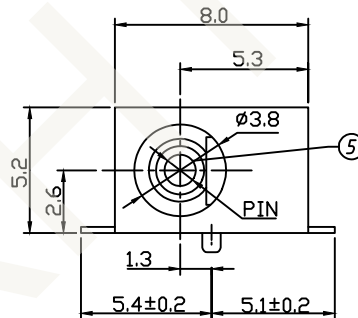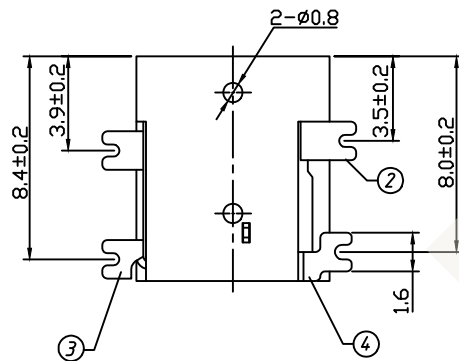

NO.	Description	QTY	Material	Plating
1	Housing	1	PPA	---
2	Spring	1	Bronze	Ag-Plating
3	Curve Piece	1	Brass	Ag-Plating
4	Curve Piece	1	Brass	Ag-Plating
5	PIN	1	Brass	Ni-Plating

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

30V 2A DC Jack DIP

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY13DC-003


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



NINGBO RHT ELECTRONIC CO.,LTD