
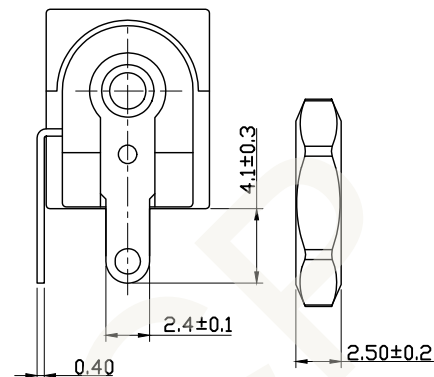
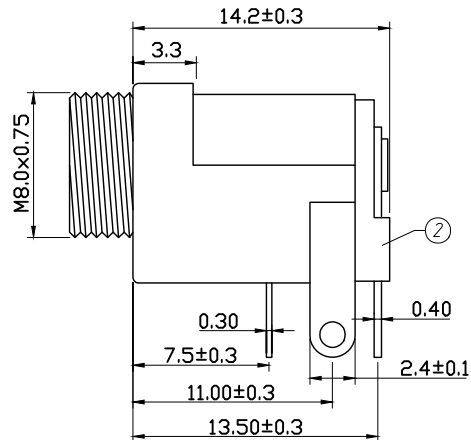


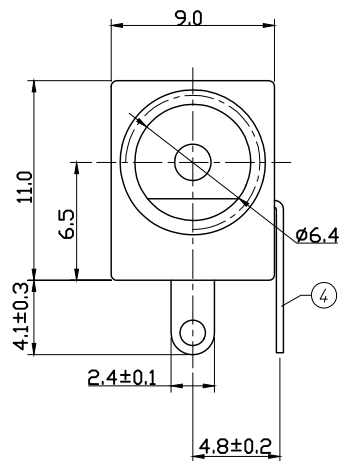

SPECIFICATION

Rated Load:DC 30V 2A

Contact resistance:30mΩ, max

Insulation resistance:100MΩ, min




Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 cycles


Operating Temperature:-30℃- 70℃

PCB Layout Top View

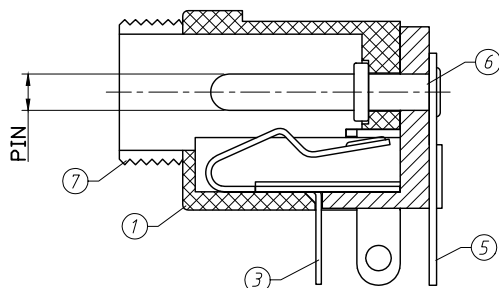

PIN	Ø2.0	Ø2.5
APPD		

SCHEMATIC



NO.	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Cover	1	PBT	---
3	Spring Piece	1	Bronze	Sn-Plating
4	Curve Piece	1	Brass	Sn-Plating
5	Flat Foot	1	Brass	Sn-Plating
6	Pin	1	Brass	Ni-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

30V 2A DC Jack DIP with Panel Mount

THIRD ANGLE PROJECTION



RHTAY13DC-006