
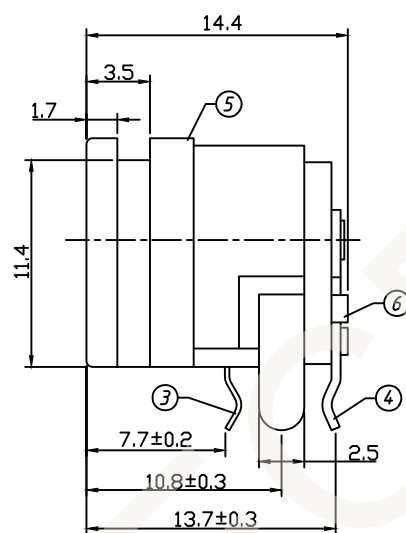


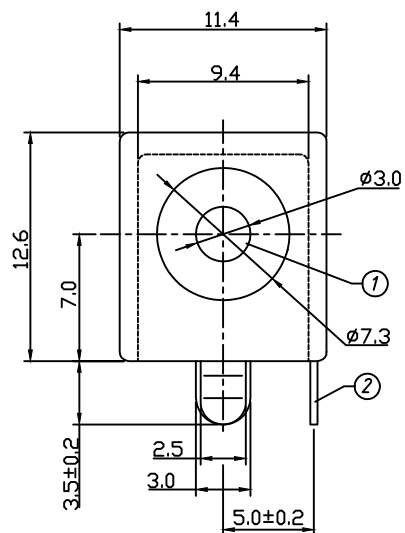

SPECIFICATION

Rated Load:DC 30V 6A

Contact resistance:30mΩ, max

Insulation resistance:100MΩ, min



Withstand Voltage:AC500V

Actuating Force:3-20N

Life:5000 cycles

Operating Temperature:-30℃-70℃

PCB Layout Top View

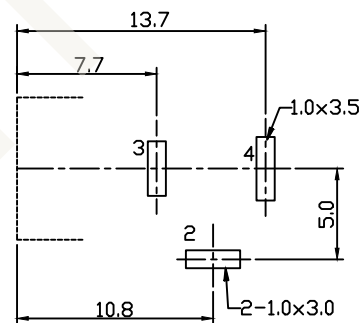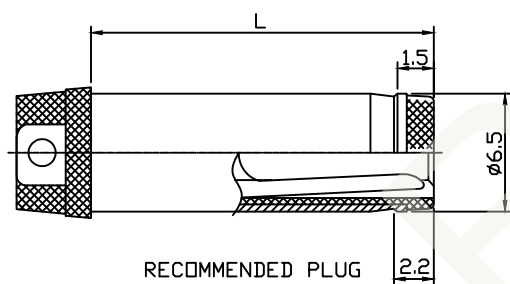

N0.	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Cover	1	PBT	---
3	Spring Piece	1	Bronze	Ag-Plating
4	Curve Piece	1	Brass	Ag-Plating
5	Flat Foot	1	Brass	Ag-Plating
6	Pin	1	Brass	Ni-Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

30V 6A DC Jack DIP

THIRD ANGLE PROJECTION



RHTAY13DC-013