
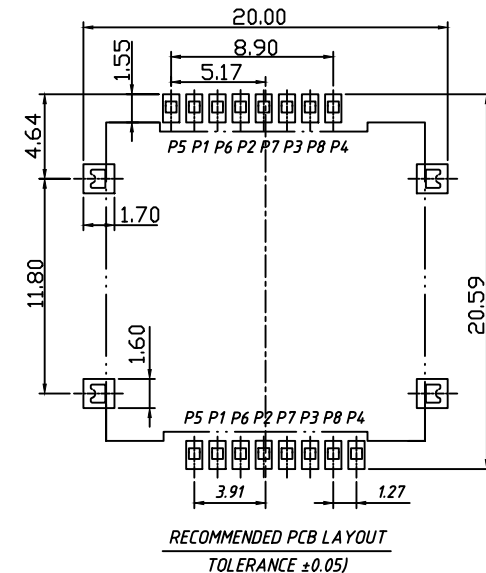
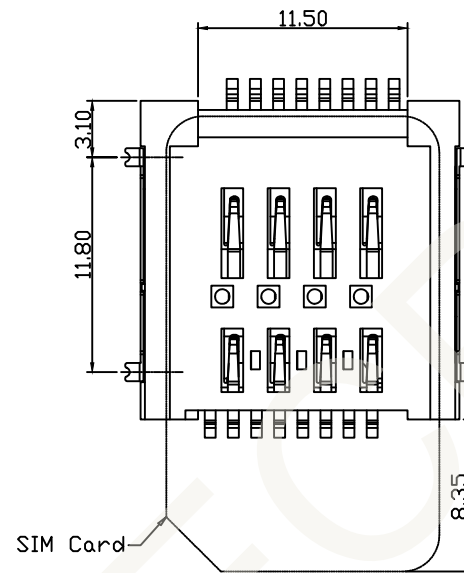
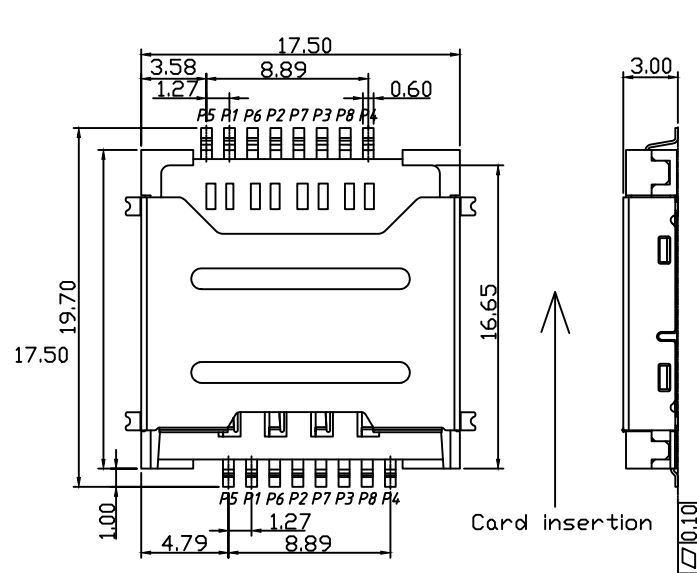


SIM CARD BOTTOM VIEW

C1:VCC
C2:RST
C3:CLK
C4:Reserved
C5:GND
C6:VPP
C7:I/O
C8:Reserved



Material:

Housing:Hi-Temperature Plastic,UL94V-0,Black.

Terminal:Copper Alloy,Gold Flash Plated On All Terminal,AND 50u" Min Nickel Underplated On Allover.

Shell:Stainless Steel,50u" Nickel Underplated On Allover ,Gold Flash On Solder PAD.

Electrical:

Current Rating:0.5A.

Voltage Rating:5.0vrms.

Insulation Resistance:1000MΩ Min.At DC500V DC.

Withstanding Voltage:250V AC RMS For 1 Minute

Contact Resistance:100mΩ Max.At 10mA/20mV max.

Operating Temperature:-40℃T0+85℃

Mating Cycles:5000 Insertions.



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Double SIM CARD CONN,PUSH PULL
8P×2,H3.0mm,SMD

THIRD ANGLE PROJECTION



RHTAYIM-033