
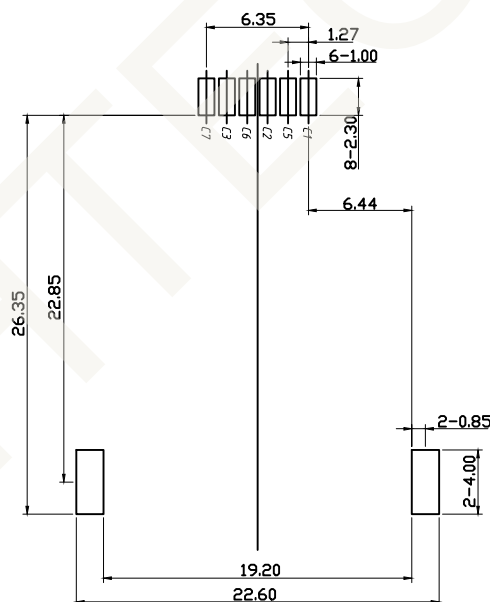
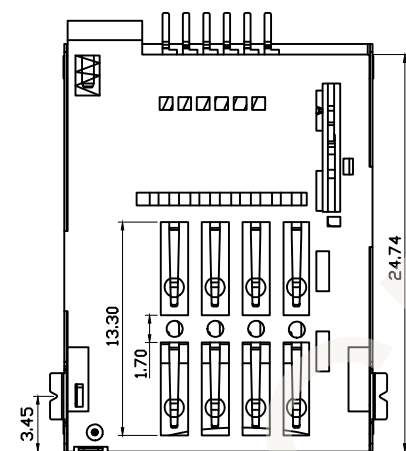


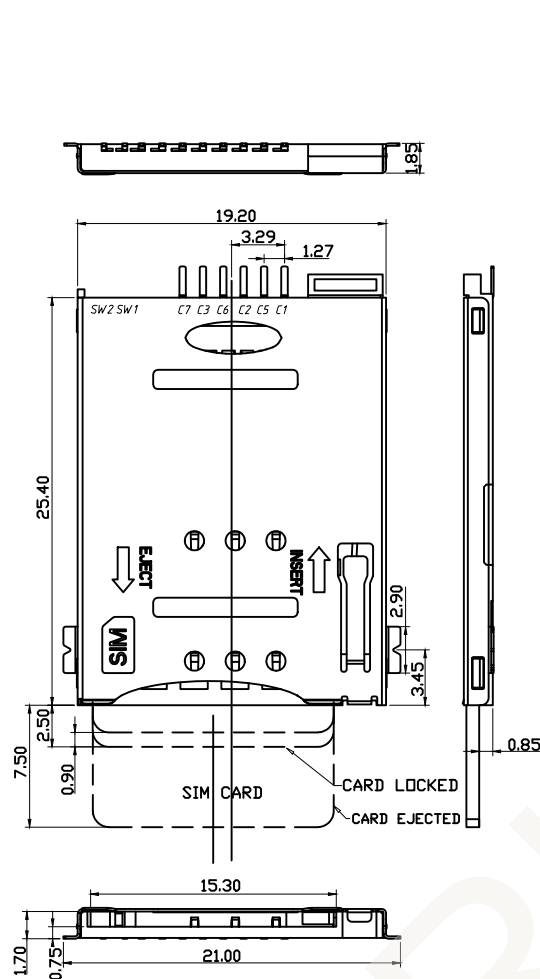

RECOMMENDED PCB LAYOUT

Electrical:

Current Rating:0.5A.

Voltage Rating:5.0 Vrms.

Insulation Resistance:500M Min.At DC 500V DC

Withstanding Voltage:250V ACrms For 1 Minute.

Contact Resistance:100M Max.At 10MA/20mV MAX.

Operating Temperature:-55℃TO +85℃

Mating Cycles:5000 Insertions.

Material:

Insulator:H-Temperature Plastic,UL 94V-0.Black

Contact:Copper Alloy, T=0.15mm

Shell:Stainless Steel, T=0.15mm

Finsh:

Terminal:50u" min Nickel Underplated on Allover,Gold

Plating on Contact Arer,80u" min

Tin on Solder Tail.

Shell:50u" Nickel Underplated on Allover,Gold Flash
on Solder Latch

SIM Pin Assignment	
Pin#	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

SIM CARD CONN:PUSH PUSH,6P,H1.85mm,SMD

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12


±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION



RHTAYIM-087-6P-H1.85-R