
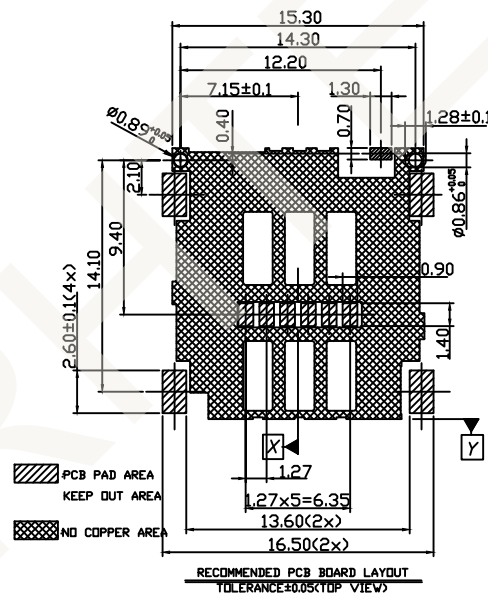
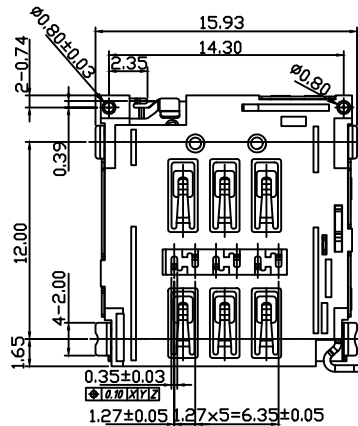

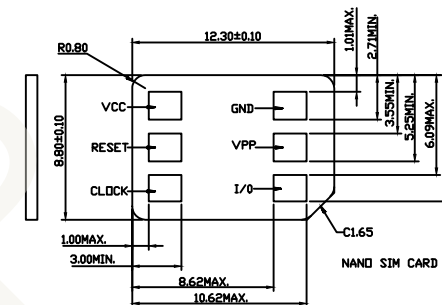


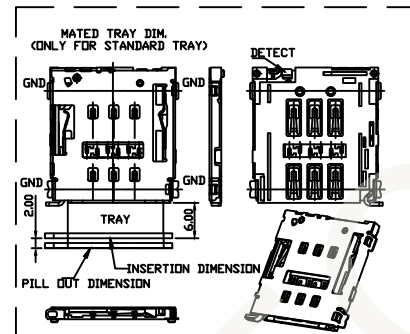

Electrical:

Current Rating:1 Amp/Pin.MAX.

Voltage:30V DC.MAX

Low Level Contact Resistance: 30mΩ Max. Initially.

Dielectric Withstanding Voltage:500V AC MIN,For 1 minute.

Insulation Resistance:100M Ω Min.500V DC .For 1minute

Durability:1000 Cycles

Operating Force (Inserting & Withdrawal): 1N- 10N.

Operating Temp Range:-25°C TO +85°C(Including Terminal Temp.Rise)

Storage Temp: °C T0 +85 °C