

Electrical:

Current Rating:1 Amp/Pin.MAX.

Voltage:30V DC.MAX

Low Level Contact Resistance:30mΩ Max.Initially.

Dielectric Withstanding Voltage:500V AC MIN.For 1 minute

Insulation Resistance:100MΩ Min.500V DC .For 1minute.


Durability:1500 Cycles.

Operating Force (Inserting & Withdrawal):1N- 10N




Operating Temp Range:-25℃ TO +85℃ (Including Terminal

Temp.Rise)

Storage Temp:-40℃ TO +85℃

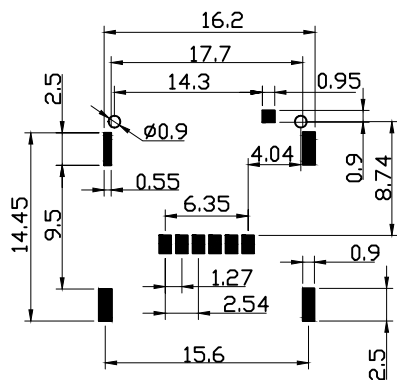

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE±0.05

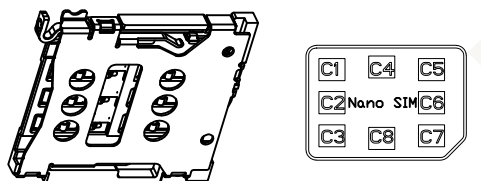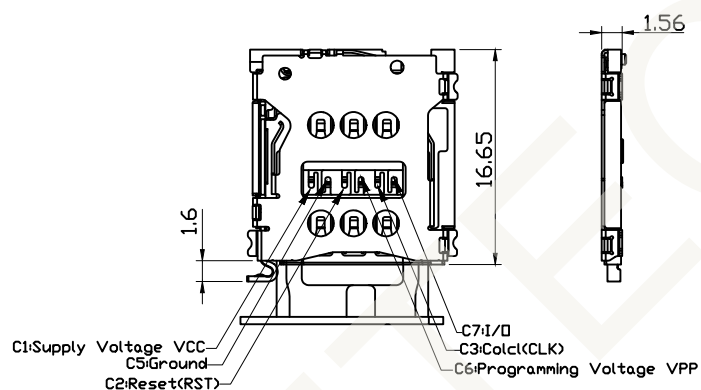

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Nano SIM CONN;Tray type,6Pin,H1.55mm,
with CD Pin

THIRD ANGLE PROJECTION



RHTAYIM-104