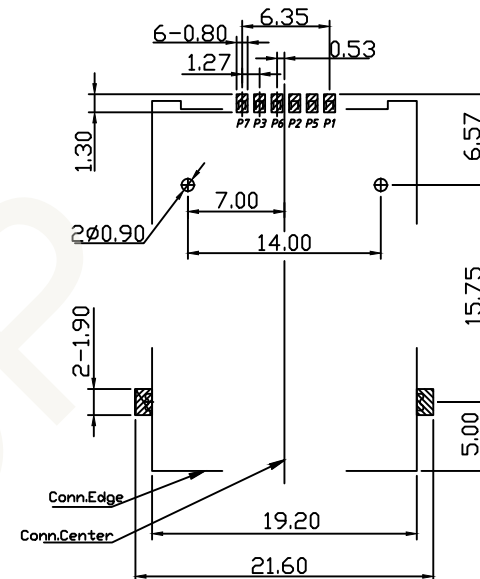
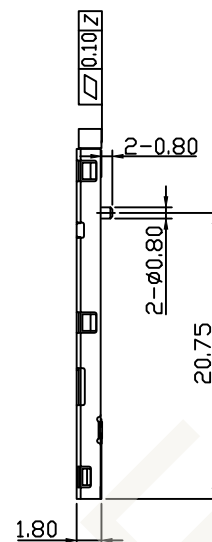
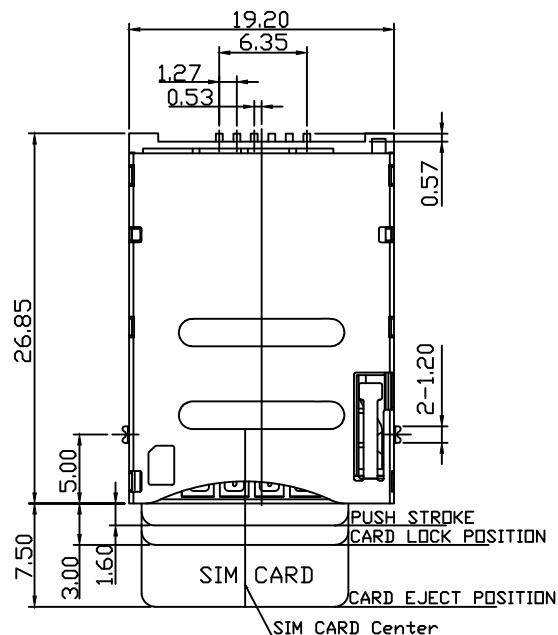


Connector Terminal No.	PIN NO.
PIN1	VCC:PWR Signal and GND
PIN2	RST:Reset signal
PIN3	CLK:Clocking signal
PIN4	GND:PWR Signal and GND
PIN5	VPP:Programming Voltage
PIN6	I/O:Serial data Input/output

Housing:Hi-Temp Plastic,UL 94V-0,Rated
Contact:Copper Alloy.
Shell:SuS.

Finish:
Gold plated on conatct area, Tin plated on
solder tails.

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

SIM CARD CONN:PUSH PUSH,6P,H1.85mm,SMD
THIRD ANGLE PROJECTION
RHTAYIM-106-R