

MATERIAL

- Housing: Nylon 66
- Rocker: PC & PA66
- Contacts: Silver Alloy
- Terminal: Brass Silver Plated
- Lamp: Neon Lamp, Tungsten Lamp
- Spring: SWP, SUS
- Movable Arm: Brass Silver Plated




ELECTRICAL

- Electrical Rating: 10(4)A 250VAC T85  
16(4)A 250VAC T125/55 1E4  
15A 125V/7.5A 250AC  
(H)Rating: 16(8)A 250VAC T85/55 1E4
- Mechanical Life: Over 30000 Cycles
- Electrical Life: Over 10000 Cycles
- Contact Resistance: <20mΩ
- Insulation Resistance: >1000MΩ
- High Voltage Resistance: >1500V 1 Min
- Ambient Temperature: Terminal Side -20°C~+85°C;  
Actuating Side -20°C~+55°C
- Storage Temperature: -30°C~+80°C Max
- Atmospheric Humidity: Max 85%
- Actuating Force: 4~8N (Depends On Different Switch Function)
- Flammability: UL94V-2
- Temperature Rise At The Terminal: Max 30°C (UL1054)
- Solder Ability Of Terminal: Max 350°C 3S

ORDER INFORMATION

RHTGY03- 11/N-C-2 RE/BK -P1.....(2)

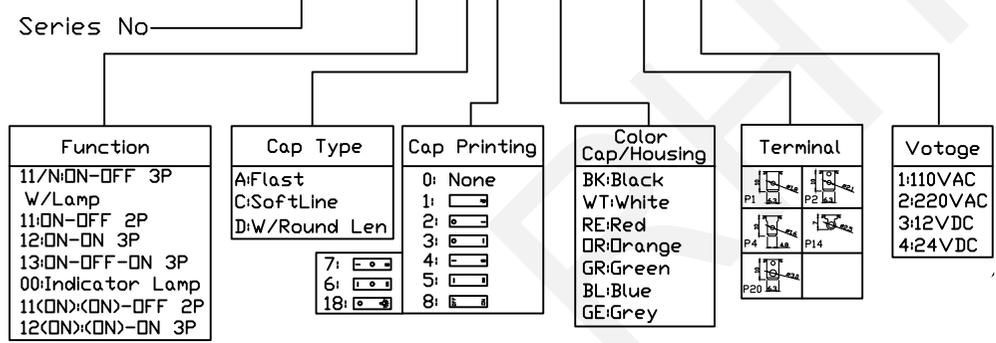

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG  
APPR BY ZHAN

Rocker Switch Series  
THIRD ANGLE PROJECTION  
  
RHTGY03