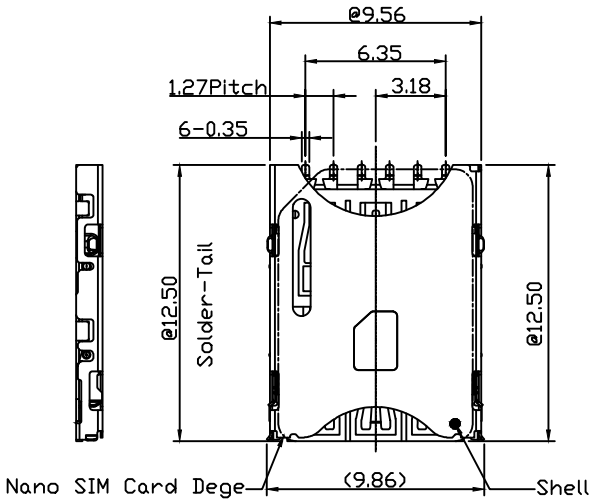

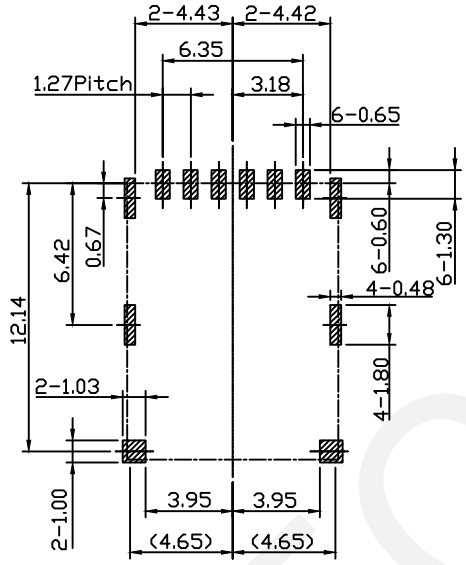

Recommended PCB Layout
Tolerance(TOP View)±0.05

Material:

Housing:High Temp. Thermoplastic,UL 94 V-0.Black

Contact:Copper Alloy 0.10T,Gold Flash On Contact Area and Solder Area 50U" Min Nickel Under-Plated

Shell:Stainless Steel 0.10T,Nickel Plating Over ALL

Electrical:

Current Rating:1A

Contact Resistance:100mΩ Max.

Insulation Resistance:500MΩ Min

Dielectric Withstanding Voltage:500V R.M.S. Min

Life Test:1500 Cycles

@ Represent Critical Dimensions

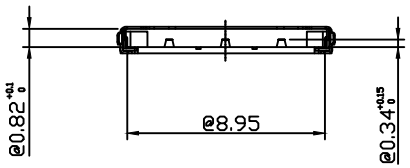



Nano SIM Card Pad

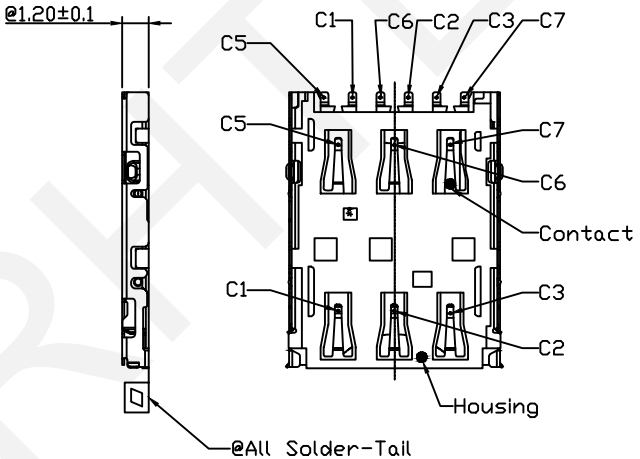

@All Solder-Tail
Terminal Solder pin Flatness 0.08Max.
Shell solder pin Flatness 0.10Max.

Order Information:

RHTAYIM-01-6P-H1.20-R

- Nard SIM Card Connector
- 6Pins
- Heighr 1.20mm
- Roll Pack

RHTECP

RHTECP NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Nano SIM Card Connector,6Pins, Height 1.2mm
	0~3	3~18	18~50	50~120	CHK'D BY FENG
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN
	THIRD ANGLE PROJECTION				RHTAYIM-01-6P-H1.20-R