

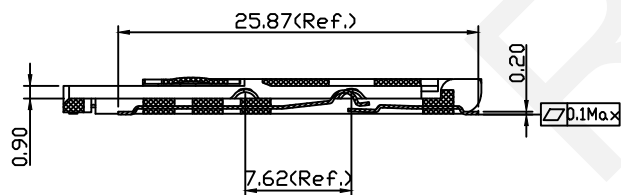
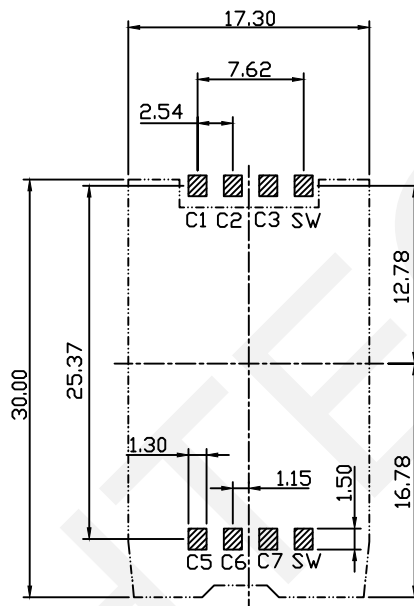
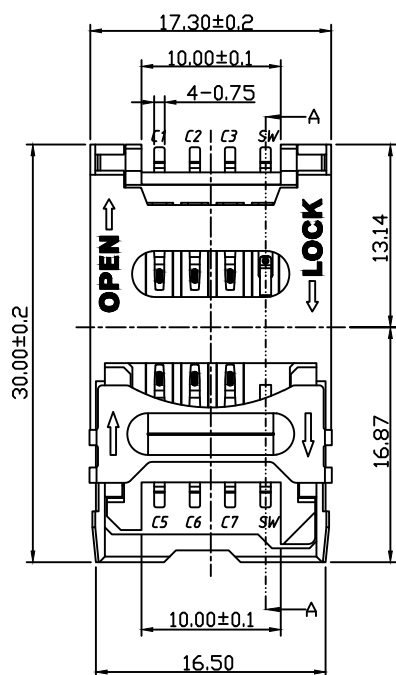


RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE±0.05)



SECTION A-A

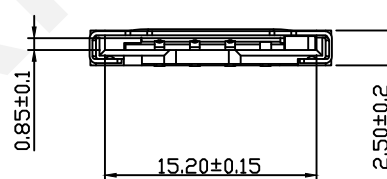

Material:
Housing:LCP UL94V-0
Contact Terminal:Phosphor Bronze
Metallic Shell:Stainless Steel-SUS304

Plating:
Contact Terminal Plating
Contact Area:5u" Gold
Soldering Area:100u" Tin
Under-plating:50u" Nickel above

Electrical:
Voltage Rating:50V max
Current Rating:1A max
Operating Temperature:-40℃to +85℃
Contact Resistance:50 mΩ typical,100mΩ max
Insulating Resistance:1000 mΩ min.Apply 500V DC
Dielectric Withstanding Voltage:500 VAC for 1minute

Mechanical:
Durability:min 5,000 cycles

Packing:
R=Roll Pack T=Tube Pack

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

SIM card connectors with switch

THIRD ANGLE PROJECTION

RHTAYIM-012C-(6+2)P-R