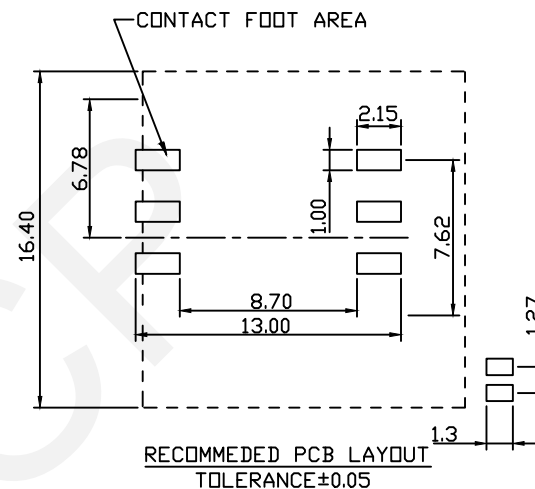

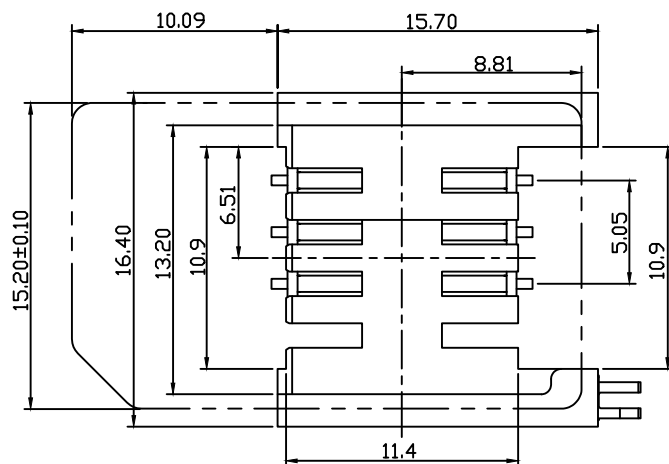


Notes:

Material: Phosphor Bronze

Housing: LCP, UL 94V-0.

Contact: Copper Alloy

Shell: Stainless Steel.

Finish:

Contact: Selective Gold Flash.

Electrical:

Voltage Current Rating: 1 A 50V AC

Insulation Resistance: 1000MΩ Min.

Contact Withstanding Voltage: AC 500V For 1 Minute.

Temperature Rating: -40℃ TO +85℃



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

SIM CARD CONN,PUSH PULL 6P ,H2.6mm,
SMD with CD Pin

THIRD ANGLE PROJECTION



RHTAYIM-078