
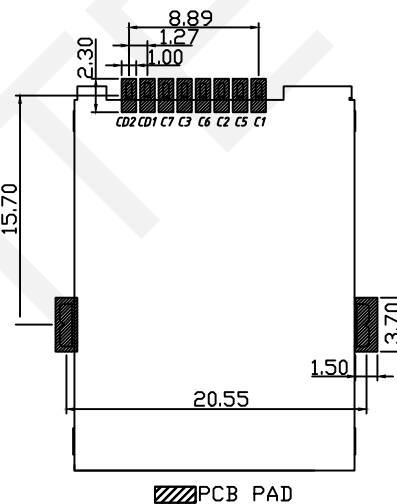
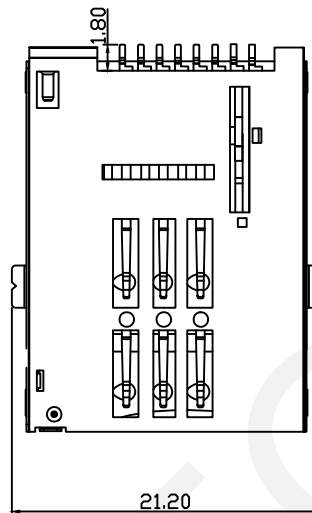
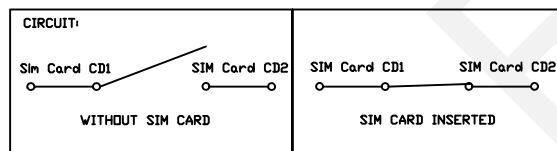
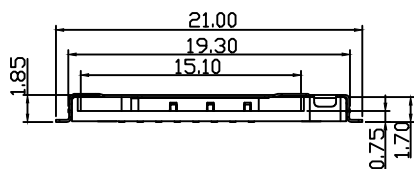


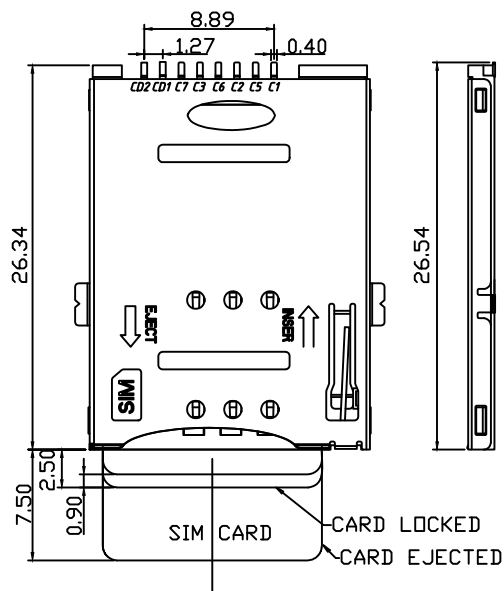

RECOMMENDED PCB LAYOUT
GENEAL TOLERANCE±0.05

Material:

Insulator:High-Temperature Plastic,UL 94 V-0,Black

Contact:Copper Alloy,T=0.15mm

Shell:Stainless Steel,T=0.15mm

Finsh:

Terminal:50u" min Nickel Underplated on Allover,Gold

Plating on Contact Area,80u" min

Tin on Solder Tail.

Shell:50u" Nickel Underplated on Allover,Gold Flash on Solder Latch.

Electrical:

Current Rating:0.5A.

Voltage Rating:5.0 Vrms


Insulation Resistance:500M Min.At DC 500V DC

Withstanding Voltage:250V ACrms For 1 Minute.

Contact Resistance:100M Max.At 10MA/20mV MAX

Operating Temperature:-55℃ TO +85℃

Mating Cycles:5000 Insertions.

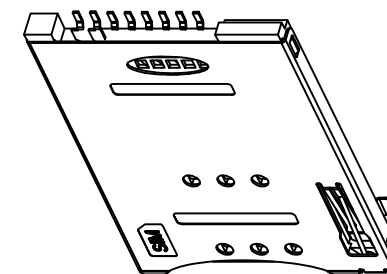

SIM Pin Assignment	
Pin#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

SIMCARD CONN,PUSH PUSH,6PH1.85mm,
SMD with CD Pin

THIRD ANGLE PROJECTION

RHTAYIM-086