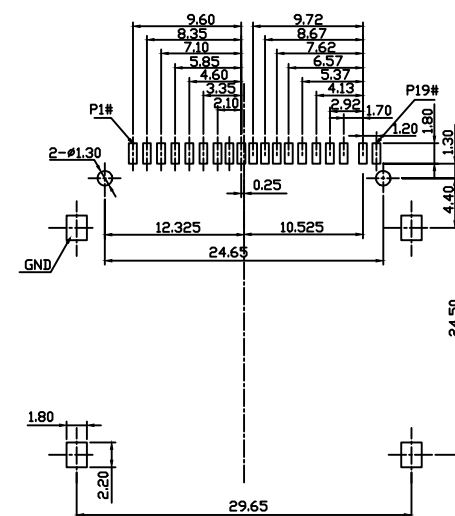
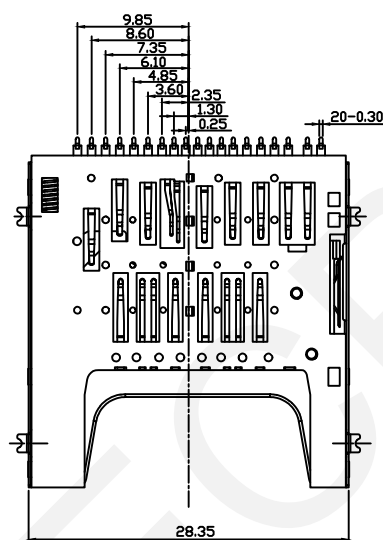


CARD DETECT	7#  8# CARD OUT	7#  8# CARD INSERT
WRITE PROTECT	19#  GND WRITE PROTECT	19#  GND WRITE ENABLE

PIN#	NAME	DESCRIPTION	PIN#	NAME	DESCRIPTION
1	VSS3	GROUND	11	VDD1	SUPPLY VOLTAGE
2	DAT2	DATA LINE BIT2	12	D1-	DIFFERENTIAL DATA 1-
3	D0+	DIFFERENTIAL DATA 0+	13	CLK	CLOCK
4	D/DAT3	CARD DETECT/DATA LINE BIT3	14	D1+	DIFFERENTIAL DATA 1+
5	D0-	DIFFERENTIAL DATA 0-	15	VSS2	SUPPLY VOLTAGE GROUND
6	CMD	COMMAND/RESPONSE	16	VSS5	GROUND
7	CD	CARD DETECT	17	DAT0	DATA LINE BIT0
8	VSS1	SUPPLY VOLTAGE GROUND	18	DAT1	DATA LINE BIT1
9	VSS4	GROUND	19	WP	WRITE PROTECT
10	VDD2	SUPPLY VOLTAGE(1.8V)			

- 1.All Dimensions Are In Millimeters.
- 2.Operating Voltage:10 VAC Max.
- 3.Current Rating:1 Amps Max.
- 4.Contact Resistance: 100mΩ Max.
- 5.Insulation Resistance:1000MΩ Min at 500VDC
- 6.Dielectric Withstanding Voltage:500VAC/1 Minute.
- 7.Operating Temperature:-20°C TO +60°C
- 8.Storage Temperature:-40°C TO +70°C
- 9.Durability:10000 Cycles.