

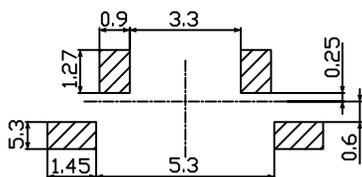
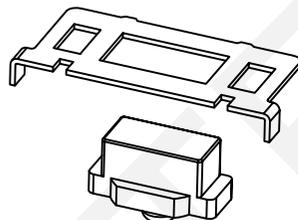
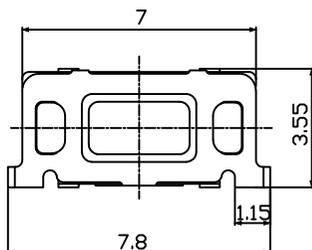
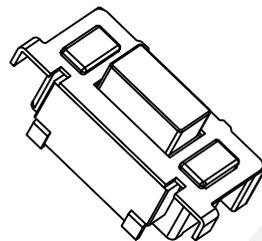




Dimension (unit: mm)

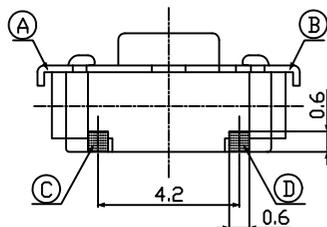

Recommended P.C.B Layout



SCHEMATIC

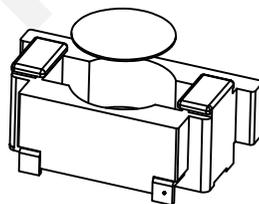

ELECTRICAL

1. Rating: 50mA 12V DC
2. Contact Resistance:  $\leq 50m\Omega$  Max (Initial)
3. Insulation Resistance:  $\geq 100M\Omega$  (Min DC 250V)
4. Dielectric Strength: AC 250V (50/60Hz For 1minute)
5. Electrically Life: 500000 Cycles
6. Environment Temperature:  $-25^{\circ}C \sim +70^{\circ}C$
7. Operating Force: 180/250 ( $\pm 30gf$ )
8. Seal Temperature:  $260^{\circ}C \sim 280^{\circ}C$

ORDER INFORMATION

RHTGYS3606B-3.5-180-B

Series No: \_\_\_\_\_

Height: 3.5mm \_\_\_\_\_

Operating Force: 180~250gf \_\_\_\_\_

Packing: B=Bulk T=Tape \_\_\_\_\_

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:----	DRWN BY PAN
0~3	3~18	18~50	50~120
$\pm 0.12$	$\pm 0.15$	$\pm 0.3$	$\pm 0.5$

CHK'D BY FENG  
APPR BY ZHAN



3x6 Tact Switch Series

RHTGYS3606B