
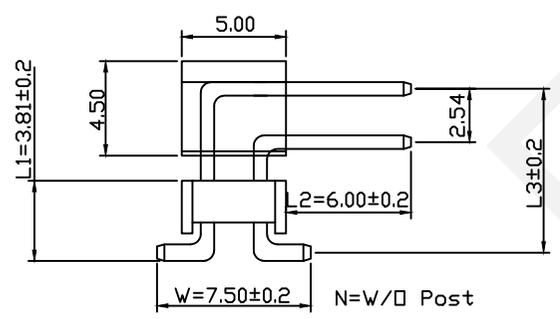
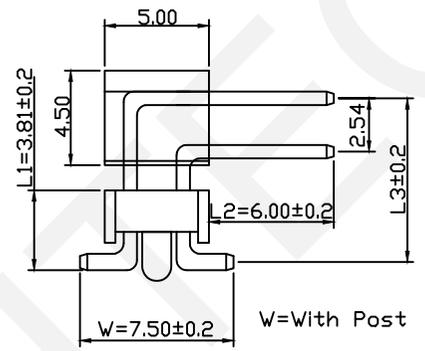


Recommended P.C.B Layout

Material:
Standard:PA6T
Contact: Brass

Electrical Characteristics:
Rated Current:3AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulator Resistance: 1000MΩ Min
Withstanding Voltage:AC500V

Mechanical
Operating Temperature: -40℃~+105℃

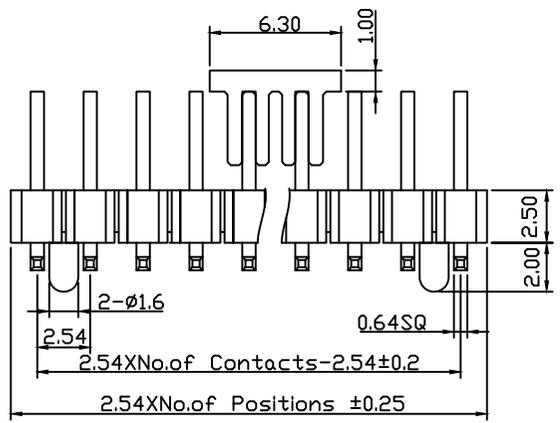

Dimension antitheses list (mm)					
ITEM	L1	L2	L3	W	Plastic Height
Standard	3.81	6.00	---	7.50	2.50
Nonstandard	---	---	---	---	---







Order Information:
RHTAY07AB-2-XX-T-L1xL2xL3xW-G0-W-R

Pin Header Series: 07AB:2.54mm
Per Row: Double layer
Pin No. of Pins: 02~40
TYPE: Horizontal SMT
Size: L1xL2xL3xW
Plating:
G0=Gold Flash G1=1u" Gold G10=10u" Gold
G15=15u" Gold G30=30u" Gold
Post:N=W/0 Post N=W/0 Post
Packing:
0=PE Bag A=Tray T=Tube
P=Tube=Cap R=Reel+Cap

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.54x2.5Pin Header Double layer,2xN
Pin horizontal SMT
THIRD ANGLE PROJECTION
RHTAY07AB-2-XX-T-L1-L2-L3xW-G0-W-R

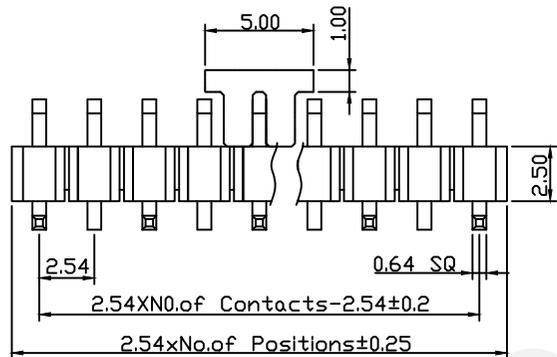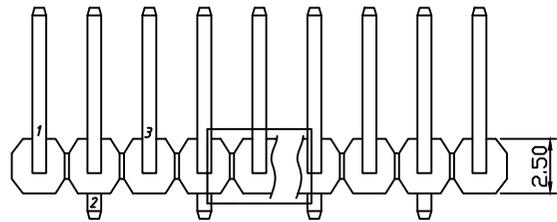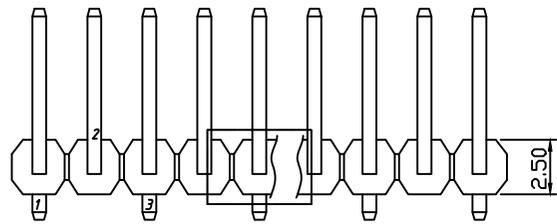

Dimension antitheses list (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	3.81	6.00	5.00	2.50
Nonstandard	---	---	---	---

Material:
Standard:PA6T
Contact: Brass

Electrical Characteristics:
Rated Current:3AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulator Resistance: 1000MΩ Min
Withstanding Voltage:AC500V

Mechanical
Operating Temperature: -40℃~+105℃

Order Information:
RHTAY07AB-1-XX-T1-L1xL2xL3xW-G0-N -R



Pin Header Series
07AB:2.54mm
Per Row:Single layer
Pin No. of Pins(1x40)
SMT Pin:T1 Type;T2 TYPE
Size:L1xL2xL3xW
Plating:
G0=Gold Flash G1=1u" Gold G10=10u" Gold
G15=15u" Gold G30=30u" Gold
Post:N=W/D Post N=W/0 Post
Packing:
□=PE Bag A=Tray T=Tube
P=Tube=Cap R=Reel+Cap

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN



2.54x2.5Pin Header Single layer,1xN
Pin horizontal SMT
THIRD ANGLE PROJECTION
RHTAY07AB-1-XX-T1-L1-L2-L3xW-G0-N-R

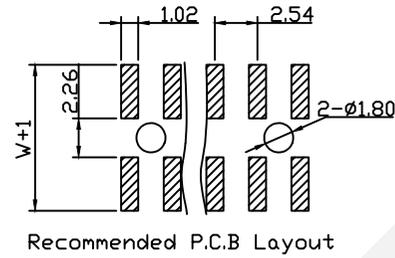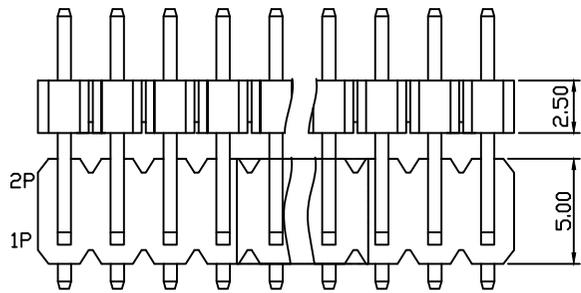

Material:
Standard:PA6T
Contact: Brass

Electrical Characteristics:
Rated Current:3AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulator Resistance: 1000MΩ Min
Withstanding Voltage:AC500V


Mechanical
Operating Temperature: -40℃~+105℃

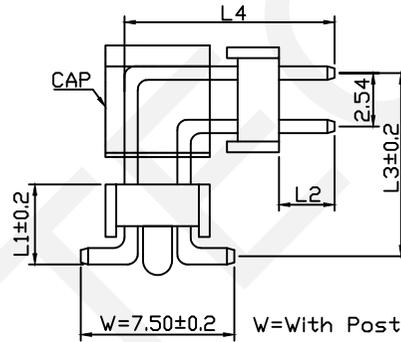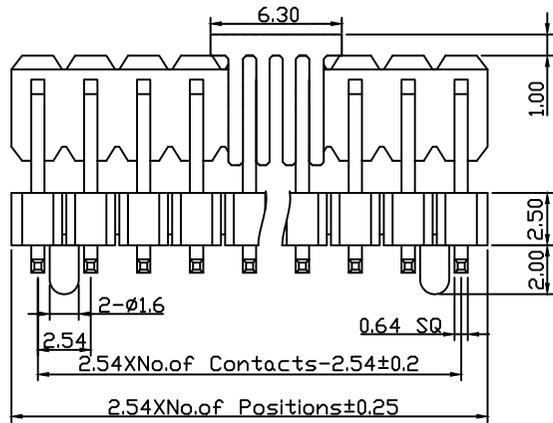

Order Information:
RHTAY07AB-2-XX-T1-L1xL2xL3xL4xW-G0-W-R

Pin Header Series: 07AB:2.54mm
Per Row: Double layer
Pin No. of Pins: (02~80)
TYPE: SMT Double Plastics
Size: L1xL2xL3xL4xW
Plating:
G0=Gold Flash G1=1u" Gold G10=10u" Gold
G15=15u" Gold G30=30u" Gold
Post:N=W/D Post N=W/0 Post

Packing:
□=PE Bag A=Tray T=Tube
P=Tube=Cap R=Reel+Cap

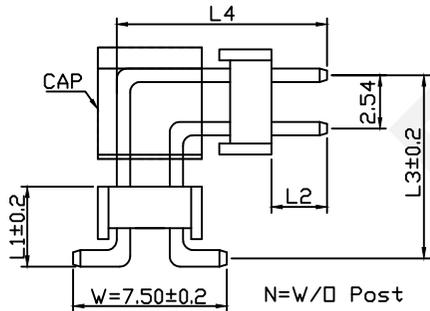

Dimension antitheses list (mm)						
ITEM	L1	L2	L3	L4	W	Plastic Height
Standard	---	---	---	---	7.50	2.50
Nonstandard	---	---	---	---	---	---

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---
0~3 3~18 18~50 50~120
±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

2.54x2.5Pin Header Double layer,2xN
Pin horizontal SMT

THIRD ANGLE PROJECTION

RHTAY07AB-2-XX-L1-L2-L3xL4W-G0-W-R