



Recommended P.C.B Hole Layout

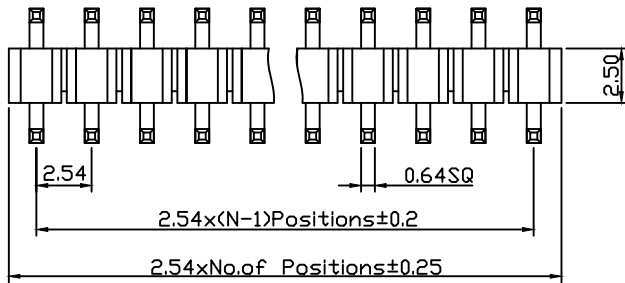

Dimension antitheses list (mm)			
ITEM	L1	L2	Plastic Height
Standard	3.60	5.50	2.50
Nonstandard	---	---	---

Material:

Housing: PA6T, UL94V-0

Contact: Brass

Electrical Characteristics:

Rated Current: 3AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 1000V AC/DC

Insulator Resistance: 1000MΩ Min

Withstanding Voltage: AC500V

Mechanical

Operating Temperature: -40℃~+105℃

Order Information:

RHTAY07AC-1-XX-R-L1xL2xG0

Pin Header Series

07AC: 2.54mm

Per Row: Single layer

Pin No. of Pins (1x40)

TYPE: Right Angle Pin

Size: L1xL2

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5


DRWN BY PAN

CHK'D BY FENG





APPR BY ZHAN

2.54mm Pin Header Single layer, Right Angle Pin. 1XN Pin

THIRD ANGLE PROJECTION



RHTAY07AC-1-XX-R-L1xL2-G0

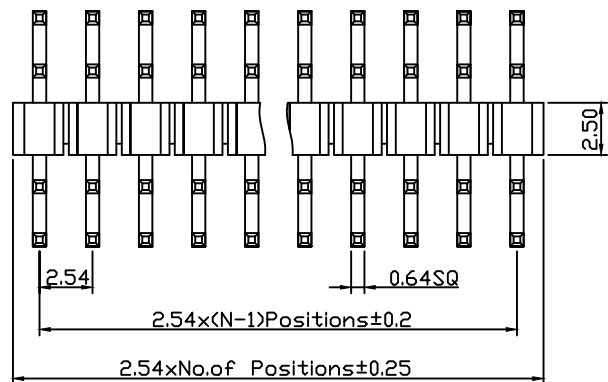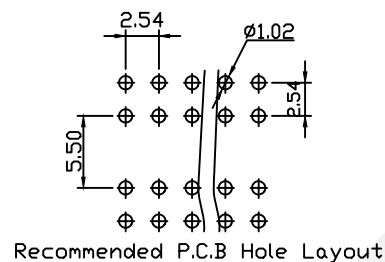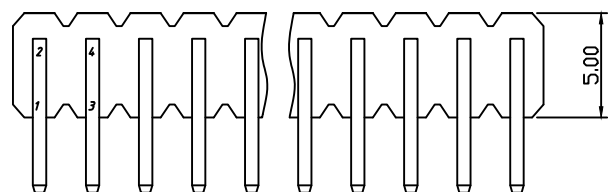

Dimension antitheses list (mm)			
ITEM	L1	L2	Plastic Height
Standard	3.60	5.50	2.50
Nonstandard	---	---	---

Material:
Housing:PA6T,UL94V-0
Contact: Brass


Electrical Characteristics:
Rated Current:3AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulator Resistance: 1000MΩ Min
Withstanding Voltage:AC500V

Mechanical
Operating Temperature: -40℃~+105℃

Order Information:

RHTAY07AC-2-XX-R-L1xL2xG0

Pin Header Series
07AC:2.54mm
Per Row:Double layer
Pin:No. of Pins(02~x80)
TYPE:Right Angle Pin
Size:L1xL2
Plating:
G0=Gold Flash G1=1u" Gold
G10=10u"Gold G15=15u" Gold
G30=30u"Gold

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN	2.54mm Pin Header Double layer,Right Angle Pin.2XN Pin	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION  RHTAY07AC-2-XX-R-L1xL2-G0	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		