
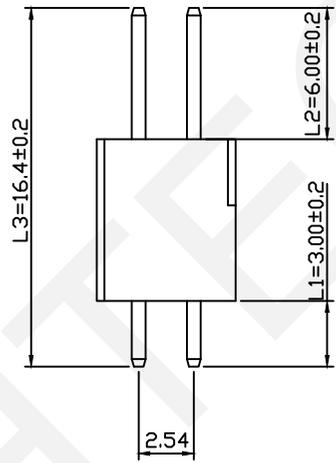


Recommended P.C.B Hole Layout

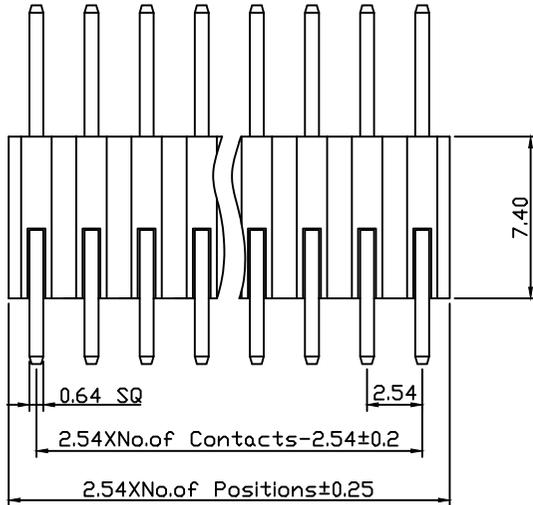

Material:

Housing: PA6T

Contact: Brass

Characteristics:

Rated Current: 3.0AMP

Contact Resistance: 20mΩ Max

Insulator Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/DC

Mechanical

Operating Temperature: -40°C ~ +105°C

Order Information:

RHTAY07AG-2-XX-S-L1xL2xL3-G0

Pin Header Series

07AB 2.54mm

Per Row: Dual Row

Pin No. of Pins (02~80)

Type: Straight Pin

Size: L1xL2xL3x

Packing:

G0=Gold Flash G1=1u" Gold G10=10u" Gold

G15=15u" Gold G30=30u" Gold

Dimension antitheses list (mm)

ITEM	L1	L2	L3	Plastic Height
Standard	3.00	6.00	16.4	7.40
Nonstandard	---	---	---	---

UNITS: mm	SHEET SIZE: A4		SCALE: ---	
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN


2.54x7.40 Pin Header Dual Row, Straight Pin, 2xN Pin	
THIRD ANGLE PROJECTION	RHTAY07AG-2-XX-S-L1xL2xL3xG0

Material:
Housing:PA6T
Contact: Brass
Characteristics:
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Insulator Resistance: 1000MΩ Min
Withstanding Voltage:500V AC/DC
Mechanical
Operating Temperature: -40℃~+105℃




Order Information:

RHTAY07AG-2-XX-R-L1xL2xL3-G0

Pin Header Series
07AB2.54mm
Per Row: Dual Row
Pin No. of Pins (02~80)
Type: Right angle Pin
Size: L1xL2xL3
Packing:
G0=Gold Flash G1=1u" Gold G10=10u" Gold
G15=15u" Gold G30=30u" Gold



Recommended P.C.B Hole Layout

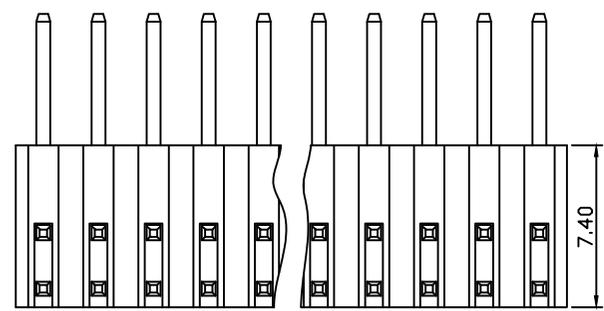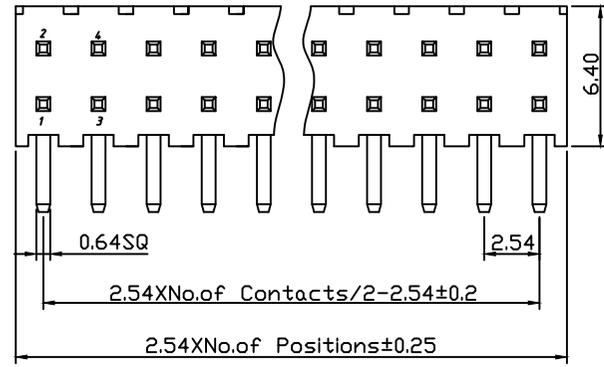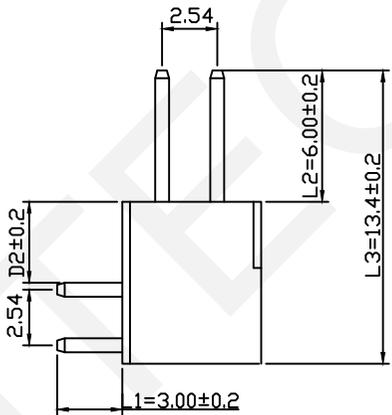

Dimension antitheses list (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	3.00	6.00	13.4	7.40
Nonstandard	---	---	---	---

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

2.54x7.40 Pin Header Dual Row, Right angle Pin, 2xN Pin
THIRD ANGLE PROJECTION
 RHTAY07AG-2-XX-R-L1xL2xL3xG0