

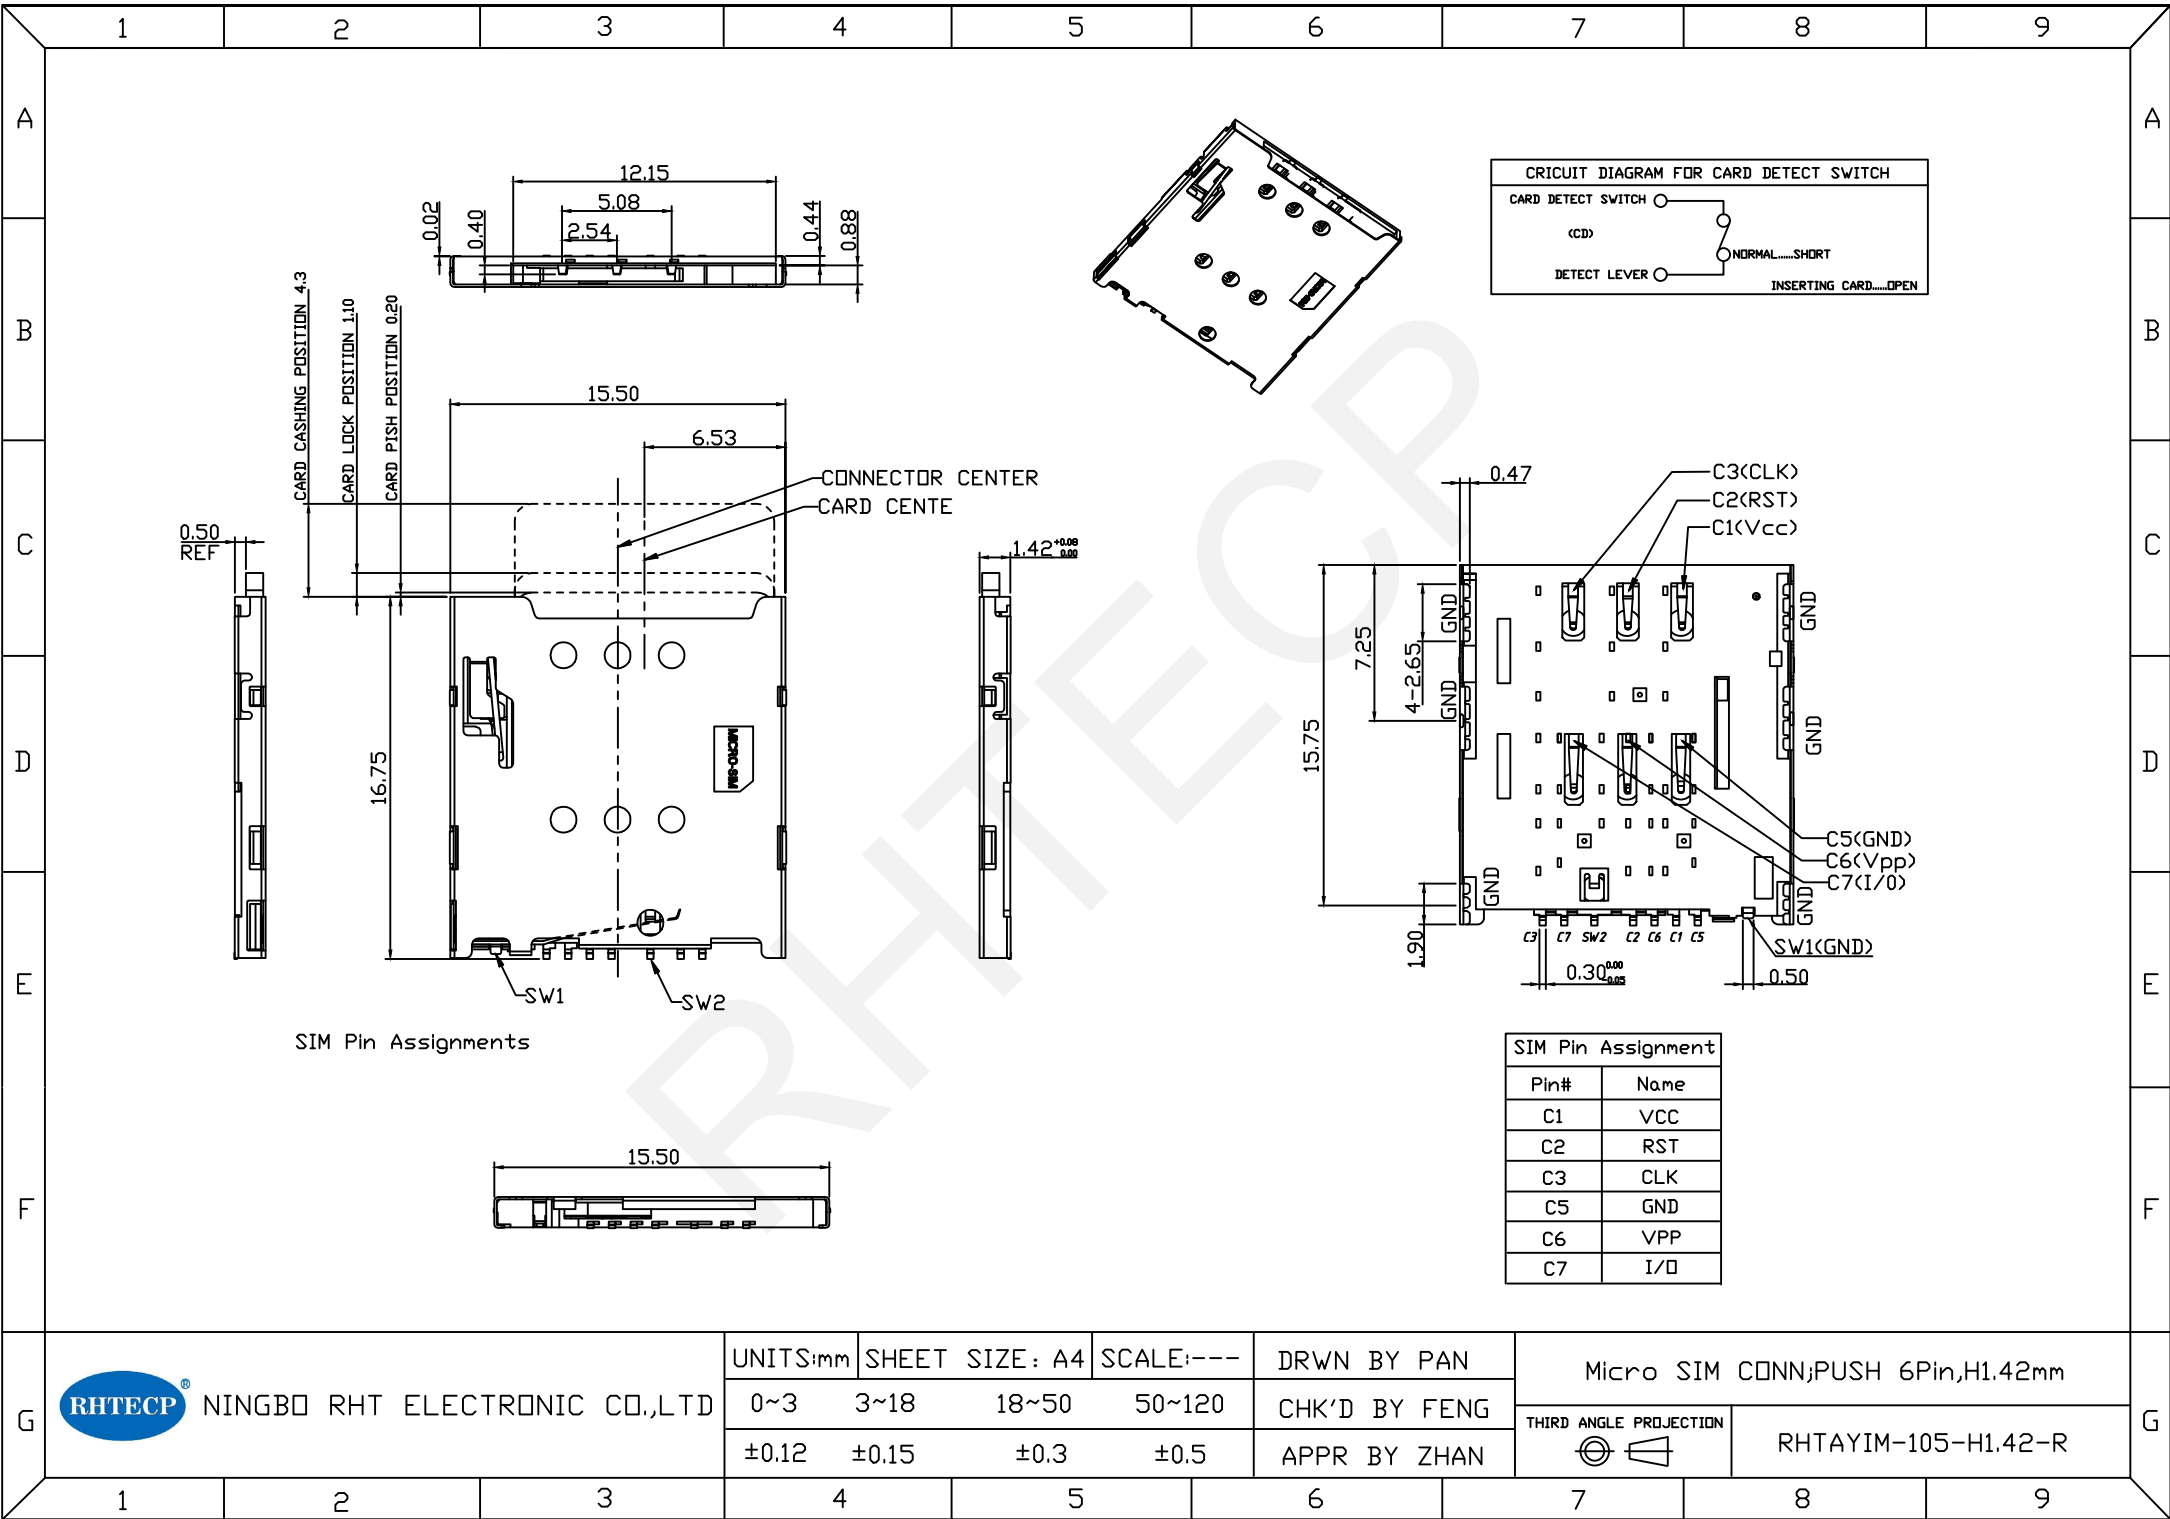


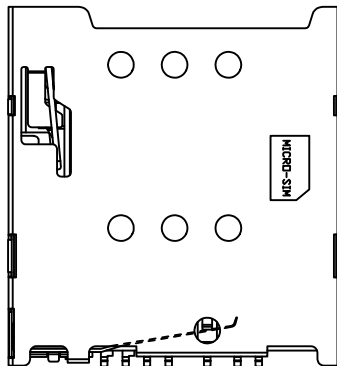

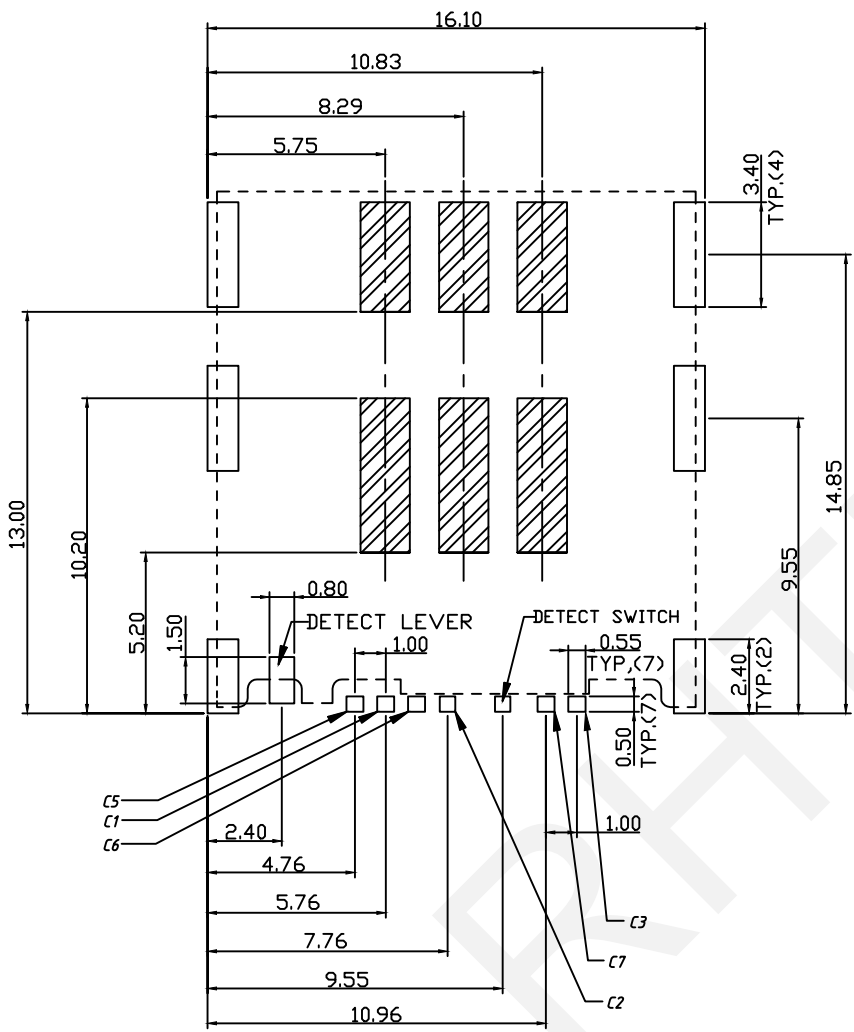

Material:

Insulator:High Temperature Thermoplastic,UL 94 V-0
Contact:Copper Alloy,Plated 50u" Ni Overall Contact Au 1U
Shell:SUS,Plated 50u" Ni Overall,Plated 1u" Au Selective Contact Area
Electrical Characteristics.
Current rating:0.5mA AC/DC max.
Ambient Temperature Range:-20℃ +60℃
Ambient Humidity Range:95% RH max
Insulation resistance:1000MΩ Min
Voltage rating:125V AC/DC
Storage Temperature Range:-40℃~+70℃
Contact resistance:100mΩ MAX
Mating Cycles:3000 Min Insertions

UNITS:mm	SHEET SIZE: A4				SCALE:---		DRWN BY PAN		Micro SIM CONN;PUSH 6Pin,H1.42mm	
	0~3	3~18	18~50	50~120	CHK'D BY FENG		THIRD ANGLE PROJECTION		RHTAYIM-105-H1.42-R	
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN					