
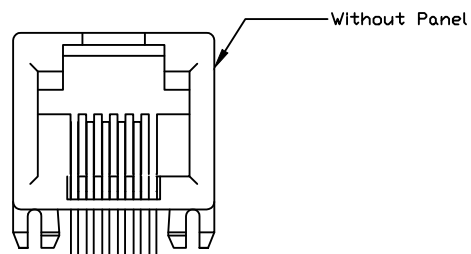
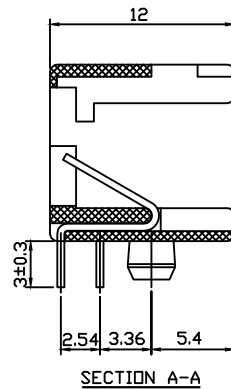
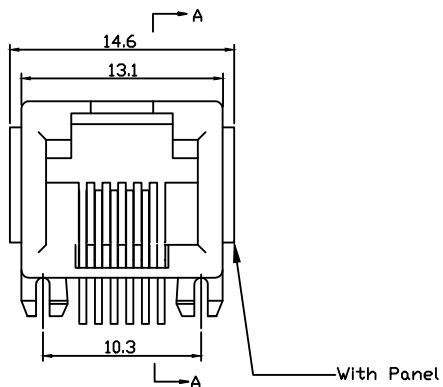


Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating: UL94V-0

Contacts: Phosphor Bronze Ø0.46mm

Plating: Gold Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: -40°C~+70°C

Order Information

RHTLY17-6P6C - X- 1 -XX

Contacts: 6P6C

Panel: W-With Panel

W/O-Without Panel

Color Code:

1-Block

Plating Code:

01-Fu* Gold Plating

02-3u* Gold Plating

03-6u* Gold Plating

04-15u* Gold Plating

05-30u* Gold Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

±0.12

±0.15

±0.3


±0.5

CHK'D BY FENG

APPR BY ZHAN

RJ12-6P6C Modular jacks

THIRD ANGLE PROJECTION



RHTLY17-6P6C-X-1-XX