

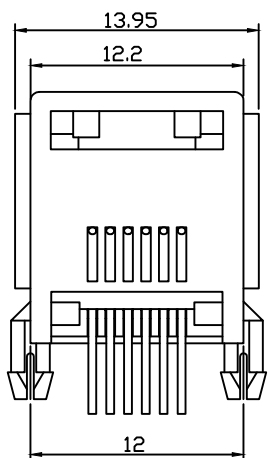



Without Panel

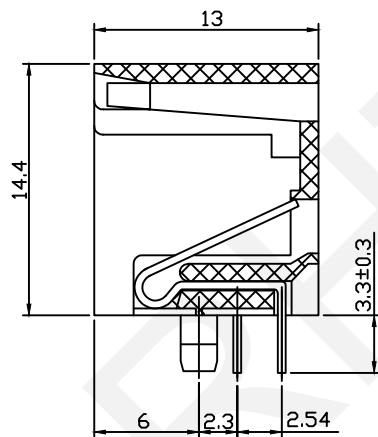

With Panel



SECTION A-A

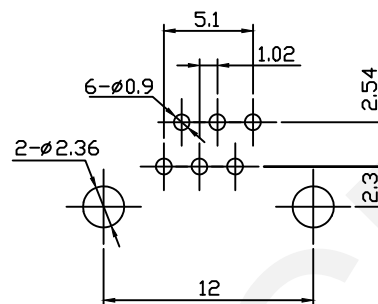

PCB Layout

#### Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating : UL94V-0

Contacts: Phosphor Bronze  $\varnothing 0.46\text{mm}$

Plating: Gold Plating

#### Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance:  $30\text{m}\Omega$  Max.

Insulation Resistance:  $500\text{M}\Omega$  Min.

Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 Cycles Min.

Operation Temperature:  $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

#### Order Information

RHTLY24-6P6C-W-1-XX

Contacts: 6P6C

Panel: W-With Panel

WD-Without Panel

Color Code:

1-Black 2-Gray

Plating Code:

01-Fu\*Gold Plating 02-3u\*Gold Plating

03-6u\*Gold Plating 04-15u\*Gold Plating

05-30u\*Gold Plating

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

RJ12-6P6C 1X1 Modular Jacks

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

$\pm 0.12$

$\pm 0.15$

$\pm 0.3$

$\pm 0.5$

APPR BY ZHAN



RHTLY24-6P6C-X-X-XX