
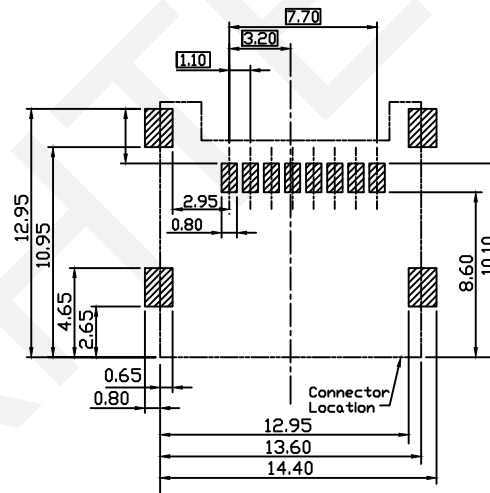
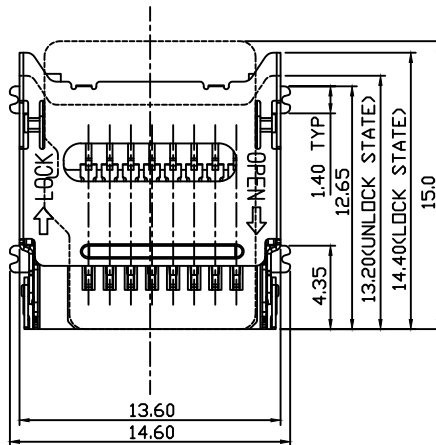
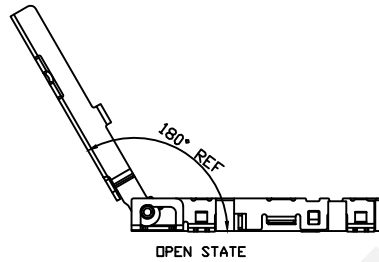
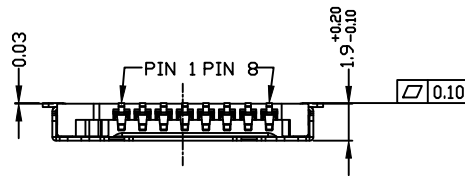


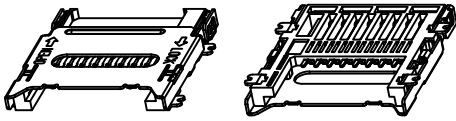

PCB LAYOUT

Material

Housing: LCP UL94V-0

Card Button: LCP UL94V-0

Reed Tab: Tin-bronze QSn6.5-0.1 GB2066-89

PACKAGE: Tape and Reel Package

Specification

Pitch: 2.54mm

Environmental Temperature: -45°C~+85°C

Voltage Rating: 100V AC

Current Rating: 0.5A Max

Withstand Voltage: 200V AC/1Minute

Insulation Resistance: 1000MΩ

Contact Resistance: 30mΩ

Life: 5000 Cycles

PIN NO	NAME	TYPE ¹	DESCRIPTION
1	DAT2	I/O/PP	Data Line[bit2]
2	CD/DAT3	I/O/PP	Card Detect Data Line[bit3]
3	CMD	PP	Command Response
4	VDD	S	Supply Votage
5	CLK	I	Clock
6	VSS	S	Supply Voltage Ground
7	DAT0	I/O/PP	Data Line [bit0]
8	DAT1 ²	I/O/PP	Data Line [bit1]



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

T-FLASH Connector Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY20F-002