


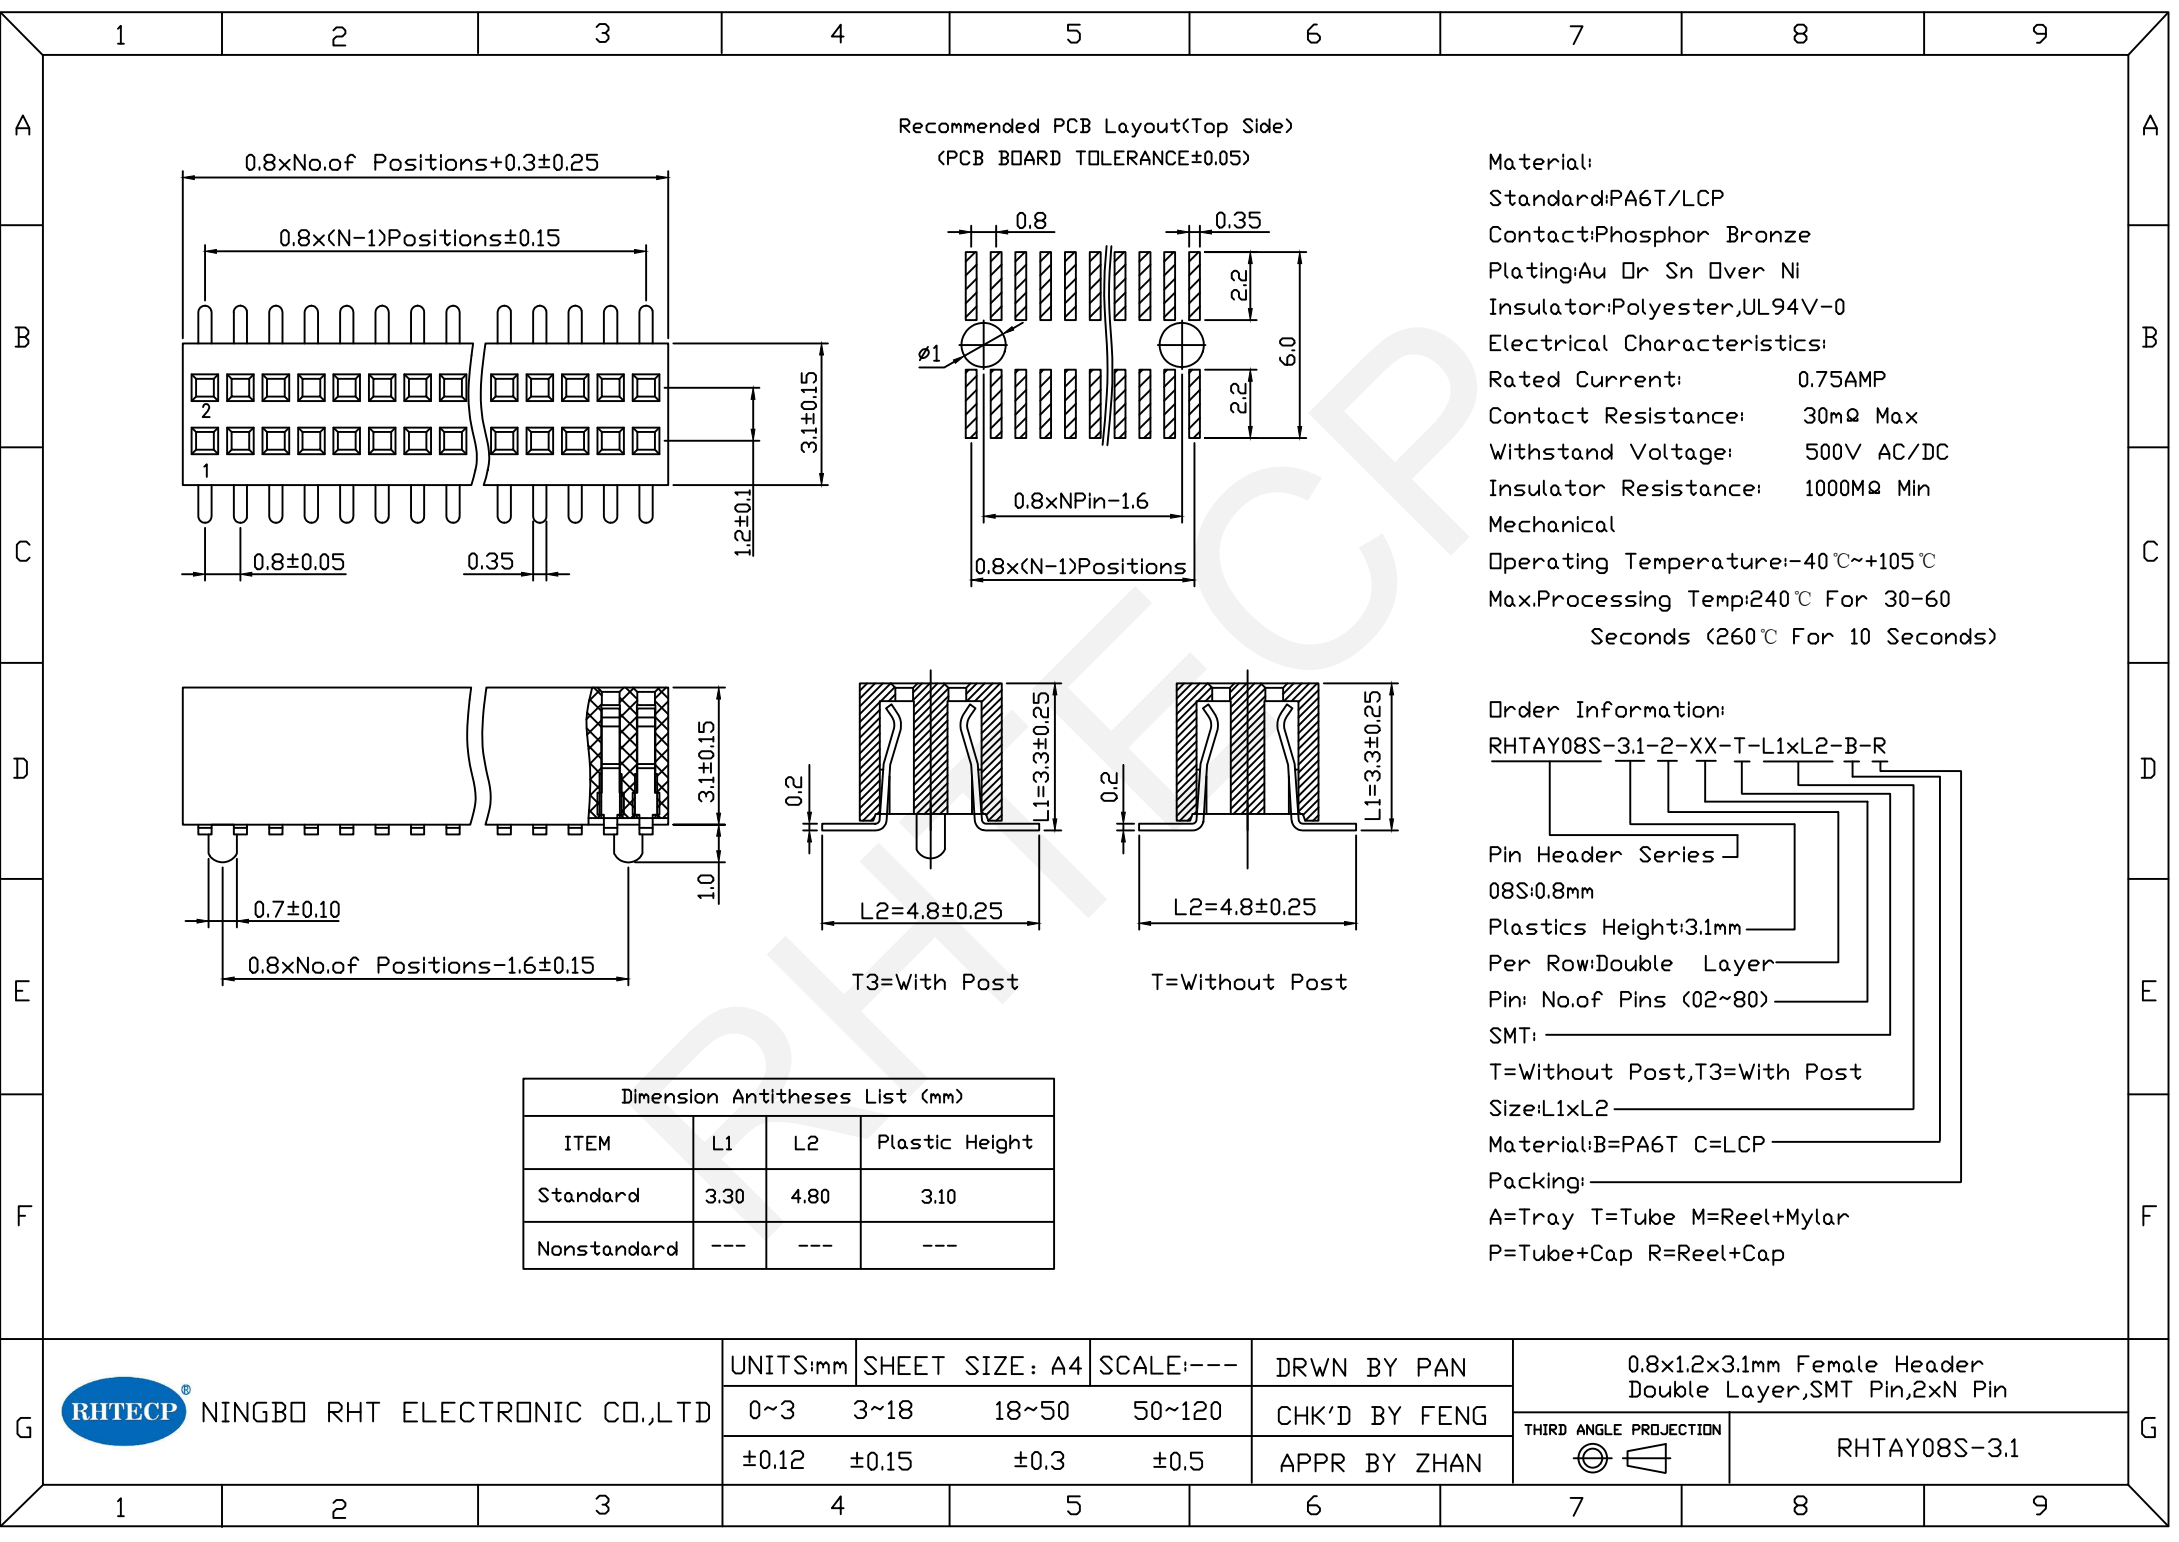

Recommended PCB Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Material:
Standard:PA6T/LCP
Contact:Phosphor Bronze
Plating:Au Or Sn Over Ni
Insulator:Polyester,UL94V-0
Electrical Characteristics:
Rated Current: 0.75AMP
Contact Resistance: 30m Ω Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000M Ω Min
Mechanical
Operating Temperature:-40 $^{\circ}$ C~+105 $^{\circ}$ C
Max.Processing Temp:240 $^{\circ}$ C For 30-60
Seconds (260 $^{\circ}$ C For 10 Seconds)

Order Information:
RHTAY08S-3.1-2-XX-T-L1xL2-B-R
Pin Header Series
08S:0.8mm
Plastics Height:3.1mm
Per Row:Double Layer
Pin: No.of Pins (02~80)
SMT:
T=Without Post,T3=With Post
Size:L1xL2
Material:B=PA6T C=LCP
Packing:
A=Tray T=Tube M=Reel+Mylar
P=Tube+Cap R=Reel+Cap

Dimension Antitheses List (mm)			
ITEM	L1	L2	Plastic Height
Standard	3.30	4.80	3.10
Nonstandard	---	---	---