

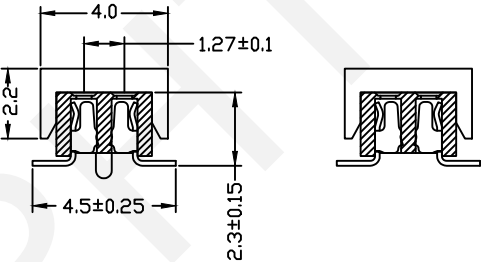
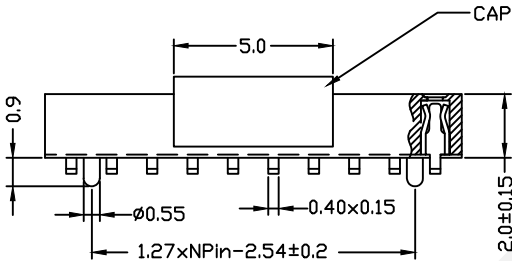
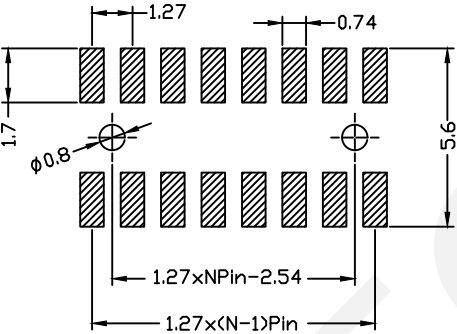


	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	CONNECTOR FEMALE HEADER 1.27MM H2.0MM PITCH ROHS THIRD ANGLE PROJECTION 	RHTAYFH0207CWG1MUT01	
	1	2	3	4	5	6	7	8	9

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

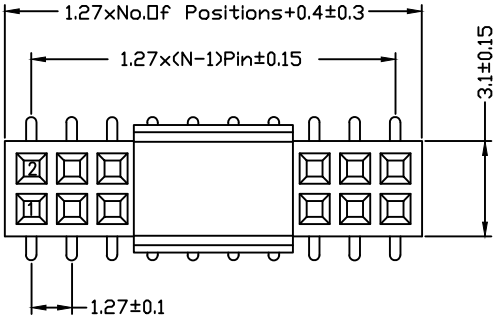

W=With Post

N=W/D Post



SPECIFICATIONS

- Rated Current:1.0AMP
- Contact Resistance:20mΩ Max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ Min
- Operation Temperature:-40°C to +105°C
- Contact Material:Phosphor Bronze
- Contact Plating:Au Over Ni
- Insulator Material:Polyester(UL94V-0)
- Standard: PA6T
- Max.Processing Temp:230°C For 30-60 Seconds
(260°C For 10 Seconds)