

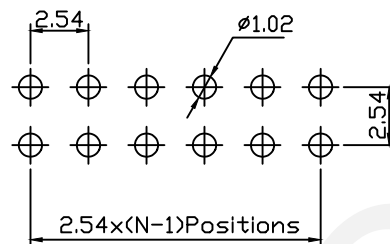
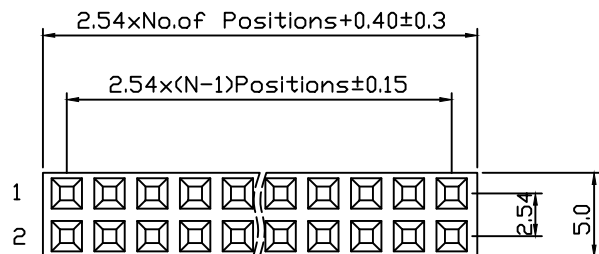


RoHS Compliance

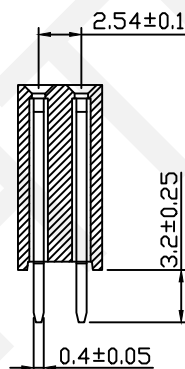

Recommended P.C.B Hole Layout

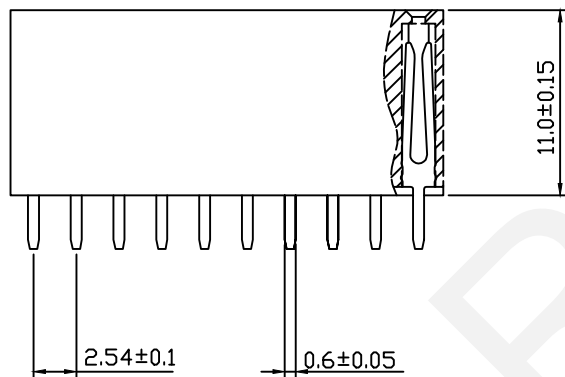

Material:  
Standard:PBT  
Contact: Brass  
Plating: Au Or Sn Over Ni  
Insulator: Polyester, UL94V-0

Electrical Characteristics:  
Rated Current: 3.0AMP  
Contact Resistance: 20mΩ Max  
Withstand Voltage: 1000V AC/DC  
Insulator Resistance: 1000MΩ Min

Mechanical  
Operating Temperature: -40℃~+105℃  
Max.Processing Temp: 180℃ For 30-60  
Seconds (200℃ For 10 Seconds)

Order Information:

RHTAY08-11.0-2-10-S

Female Header

08:2.54mm

Plastics Height:

11.0mm

Per Row: Double Layer

Pin: No.of Pins (02~80)

Type: Straight Pin

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

2.54x11.0mm Female Header  
Double Layer, Straight Pin, 2xN Pin

THIRD ANGLE PROJECTION



RHTAY08-11.0-2-10-S