


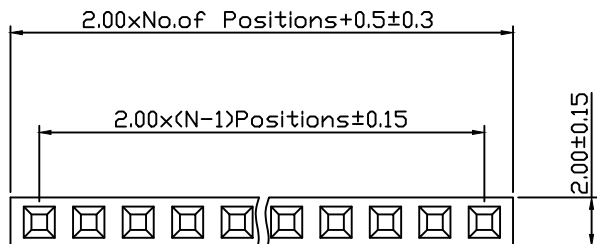


RoHS Compliance

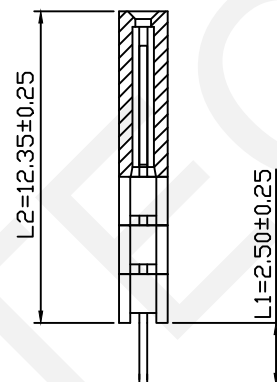

Recommended PCB Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

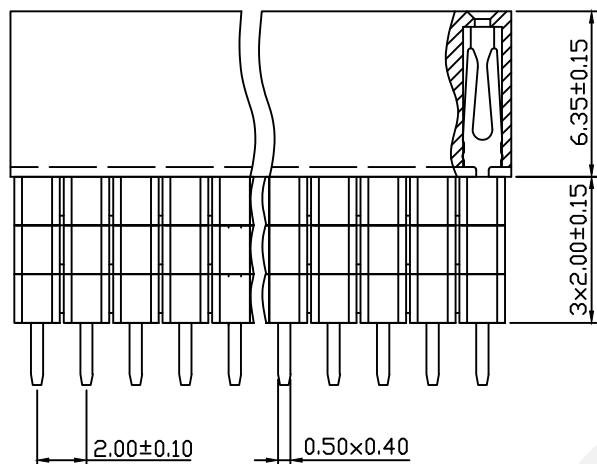

Material:

Standard:PBT/PA6T

Contact: Brass

Plating: Au Or Sn Over 50u" Ni

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.5AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -55℃~+125℃

Order Information:

RHTAY08BX-6.35-1-XX-S-L1xL2-B

Pin Header Series

08BX:2.00mm

Plastics Height:6.35mm

Per Row:Single Layer

Pin: No.of Pins (1x40)

Type: Straight Pin

Size: L1xL2

Material: A=PBT B=PA6T C=LCP

Dimension Antitheses List (mm)

ITEM	L1	L2	Plastic Height
Standard	2.50	12.35	6.35
Standard	2.50	10.35	6.35
Standard	2.50	8.35	6.35



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN





2.0x6.35mm+H Female Header
Single Layer, Straight Pin, 1xN Pin

THIRD ANGLE PROJECTION



RHTAY08BX-6.35-1-XX-S-L1xL2-B

RoHS Compliance

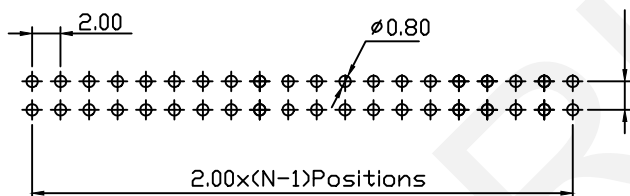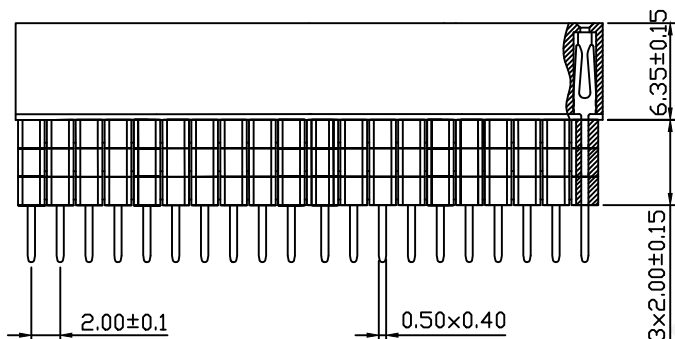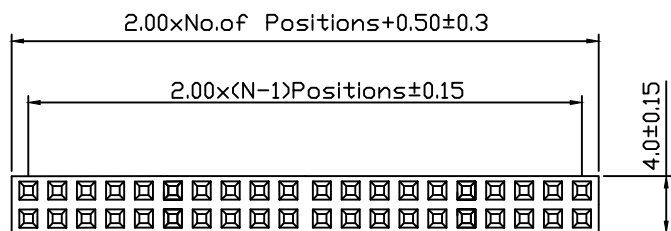

Recommended PCB Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimension Antitheses List (mm)			
ITEM	L1	L2	Plastic Height
Standard	2.50	12.35	6.35
Standard	2.50	10.35	6.35
Standard	2.50	8.35	6.35

Material:

Standard:PBT/PA6T

Contact: Brass

Plating: Au Or Sn Over Ni

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.5AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40℃~+105℃

Order Information:

RHTAY08BX-6.35-2-XX-S-L1xL2-B

Pin Header Series

08BX:2.00mm

Plastics Height:6.35mm

Per Row:Double Layer

Pin: No.of Pins (02~80)

Type: Straight Pin

Size: L1xL2

Material: A=PBT B=PA6T C=LCP



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

2.0x6.35mm+H Female Header
Double Layer, Straight Pin, 2xN Pin

THIRD ANGLE PROJECTION



RHTAY08BX-6.35-2-XX-S-L1xL2-B