


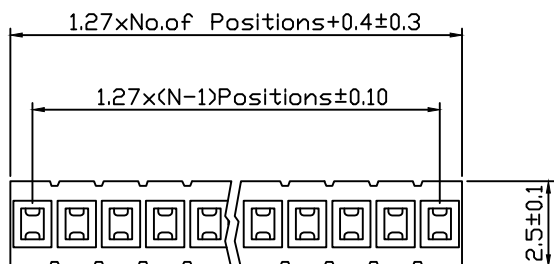


RoHS Compliance

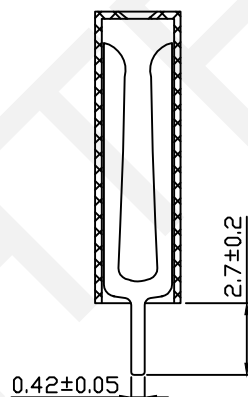

Recommended P.C.B Layout<Top Side>
(PCB BOARD TOLERANCE±0.05)

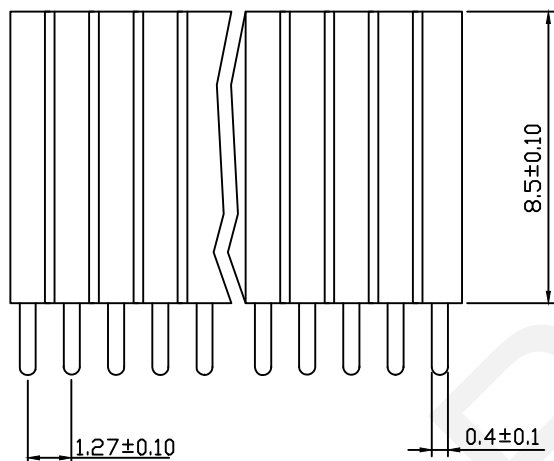

Material:

Standard:PA6T/LCP

Contact: Brass

Plating: Au Or Sn Over 50u" Ni

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40℃~+105℃

Max.Processing Temp: 230℃ For 30-60

Seconds (260℃ For 10 Seconds)

Order Information:

RHTAY08C-8.5-1-XX-S-B

Female Header

08C:1.27mm

Plastics Height:8.5mm

Per Row:Single Layer

Pin: No.of Pins(1x40)

Type: Straight Pin

Material: B=PA6T C=LCP



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

±0.12

±0.15

±0.3


±0.5

CHK'D BY FENG

APPR BY ZHAN

1.27x2.54xx8.5mm Female Header
Single Layer, Straight Pin, 1xN Pin

THIRD ANGLE PROJECTION



RHTAY08C-8.5-1-XX-S-B